

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
<b>HH10</b>
<b>Cable:</b> stainless steel (galvanised HHG10)
<b>Retainer bars:</b> aluminium alloy/SurTec
<b>Screws</b> alloy steel/zinc plate
<b>Inserts:</b> stainless steel. All stainless steel version HHSS10
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-10	45	58	0,25
-20	51	65	0,27
-25	56	73	0,29
-30	60	82	0,31
-35	60	91	0,32
-38	64	97	0,33
-40	64	102	0,34
-50	79	110	0,35

Interfaces	Bar 1		
	fixtures holes D	2 through holes ø 7mm	2 through holes ø 7mm countersunk 90°
Bar 2			
2 through holes ø 7mm	TM2	not standard	not standard
2 through holes ø 7mm countersunk 90°	TCM	CM2	not standard
2 inserts M6	TIM	CIM	IM2



Example HH10-30CIM



Prefix: 'half helical' mount from the HH10 series




Model: -30 height: 60mm width: 82mm mass: 0,31kg 4 loops

Model: -30-02 = = = 2 loops

Suffix: CIM 2 through holes ø 7mm countersunk 90° in bar 1, 2 inserts M6 in bar 2



Note: Standard models in this series have 4 loops

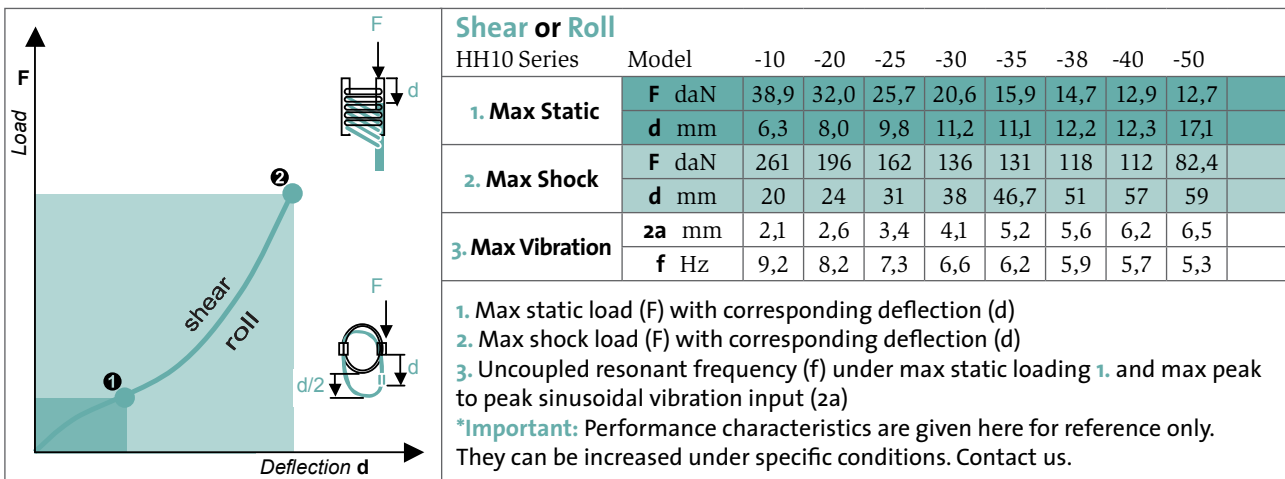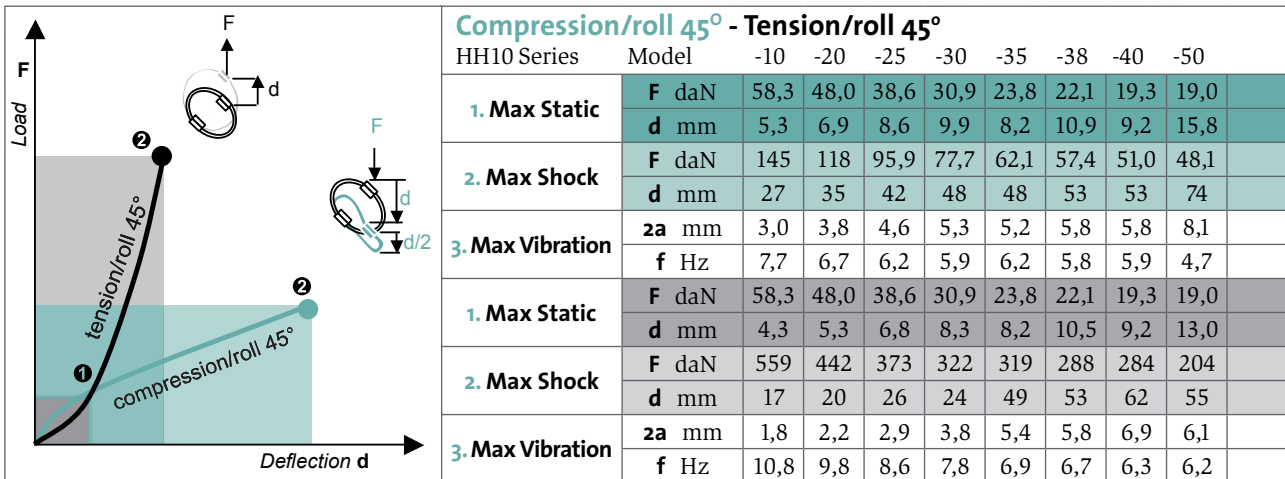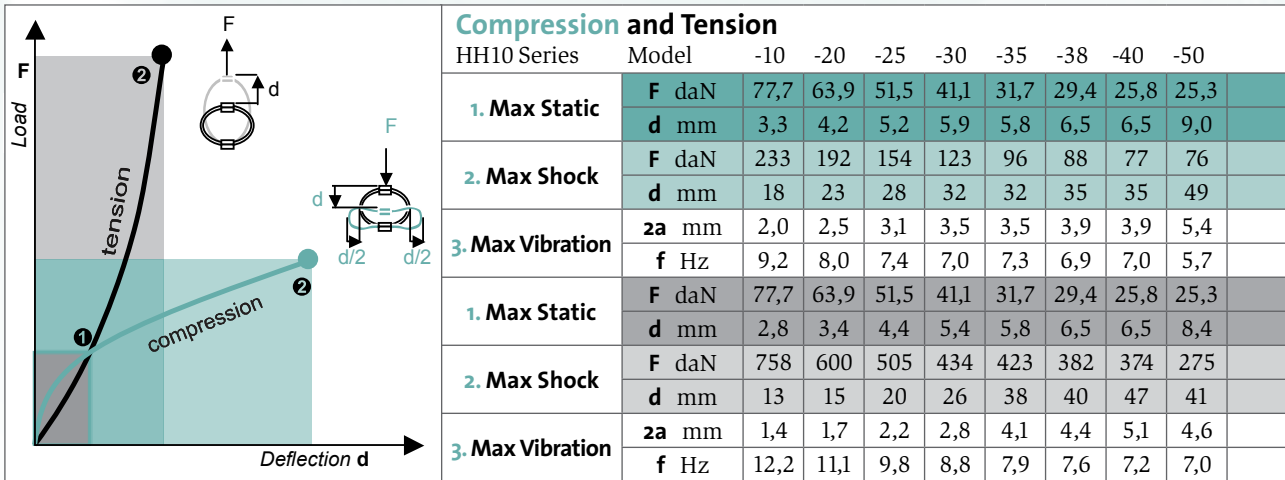

**Typical shock/vibration specifications:**

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.