

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
<b>HH11</b>
<b>Cable:</b> stainless steel (galvanised HHG11)
<b>Retainer bars:</b> aluminium alloy/SurTec
<b>Screws</b> alloy steel/zinc plate
<b>Inserts:</b> stainless steel. All stainless steel version HHSS11
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-12	68	83	0,70
-15	71	87	0,75
-20	74	93	0,80
-30	77	107	0,85
-35	89	111	0,90
-40	105	124	1,00
-50	108	143	1,07
-60	124	146	1,14
-70	134	156	1,20

Interfaces	Bar 1		
	fixtures holes D	2 through holes ø 8,5mm	2 through holes ø 8,5mm countersunk 90°
Bar 2			
2 through holes ø 8,5mm	TM2	not standard	not standard
2 through holes ø 8,5mm countersunk 90°	TCM	CM2	not standard
2 inserts M8	TIM	CIM	IM2

Example HH11-30CIM

<b>H</b>	<b>H</b>	<b>1</b>	<b>1</b>	<b>-</b>	<b>3</b>	<b>0</b>	<b>C</b>	<b>I</b>	<b>M</b>
----------	----------	----------	----------	----------	----------	----------	----------	----------	----------




Prefix: 'half helical' mount from the HH11 series

Model: -30 height: 77mm width: 107mm mass: 0,85kg 4 loops

Model: -30-02 = = = 2 loops

Suffix: CIM 2 through holes ø 8,5mm countersunk 90° in bar 1, 2 inserts M8 in bar 2

Note: Standard models in this series have 4 loops

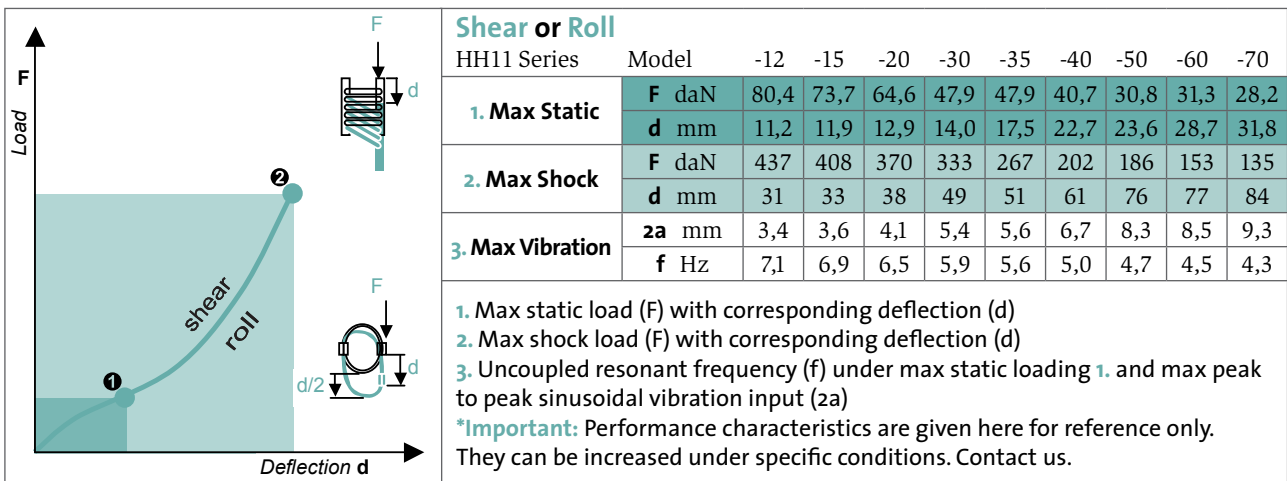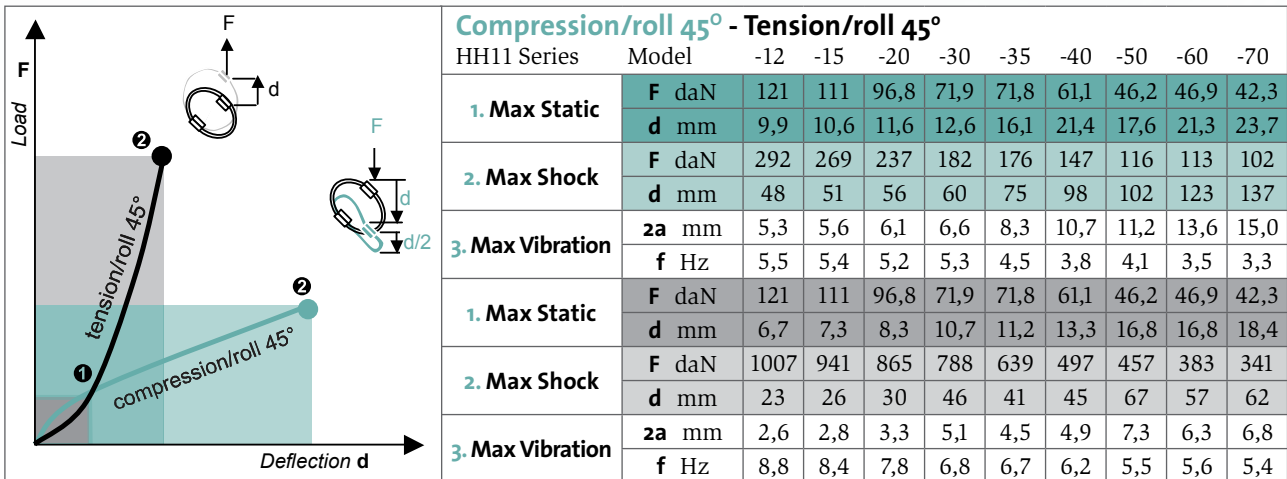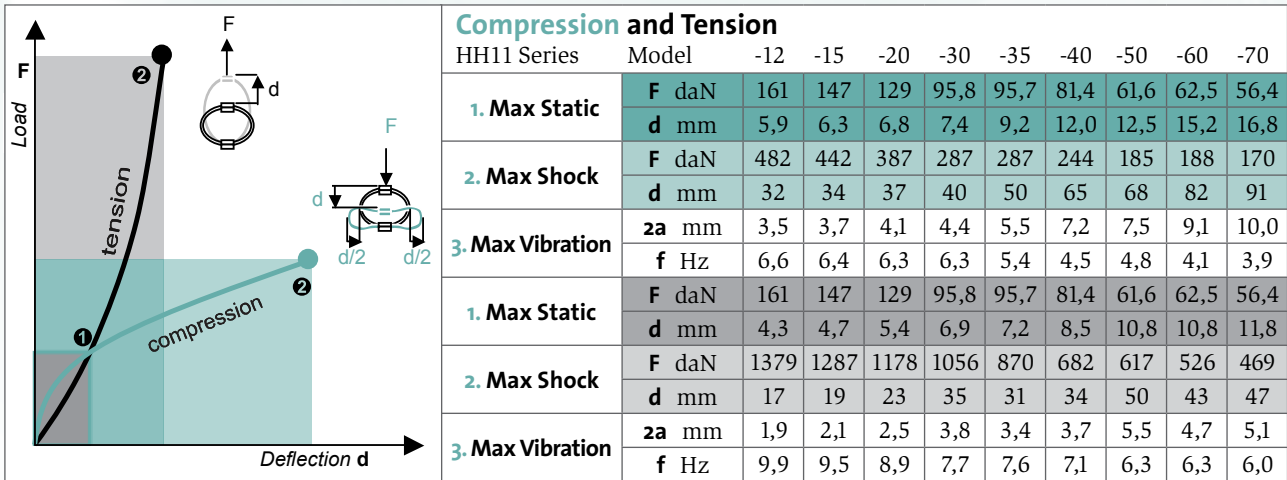

**Typical shock/vibration specifications:**

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.