

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
HH14
Cable: stainless steel (galvanised HHG14)
Retainer bars: aluminium alloy/SurTec
Screws alloy steel/zinc plate
Inserts: stainless steel. All stainless steel version HHSS14
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-12	76	92	0,90
-15	83	102	1,00
-17	89	105	1,05
-20	95	121	1,10
-30	108	133	1,20
-40	124	143	1,35
-50	137	156	1,50
-60	155	180	1,75
-70	166	186	1,85




Interfaces	Bar 1		
	fixtures holes D	2 through holes ø 8,8mm	2 through holes ø 8,8mm countersunk 90°
Bar 2			
2 through holes ø 8,8mm	TM2	not standard	not standard
2 through holes ø 8,8mm countersunk 90°	TCM	CM2	not standard
2 inserts M8	TIM	CIM	IM2

Example HH14-30CIM

H	H	1	4	-	3	0	C	I	M
----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

- Prefix: 'half helical' mount from the HH14 series
- Model: -30 height: 108mm width: 133mm mass: 1,20kg 4 loops
- Model: -30-02 = = = 2 loops
- Suffix: CIM 2 through holes ø 8,8mm countersunk 90° in bar 1, 2 inserts M8 in bar 2

Note: Standard models in this series have 4 loops

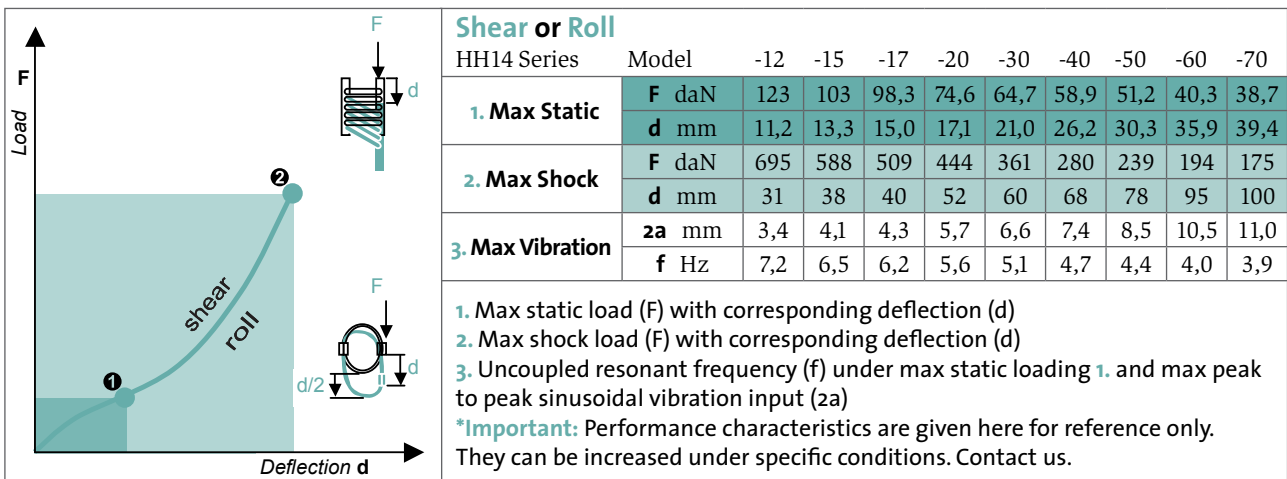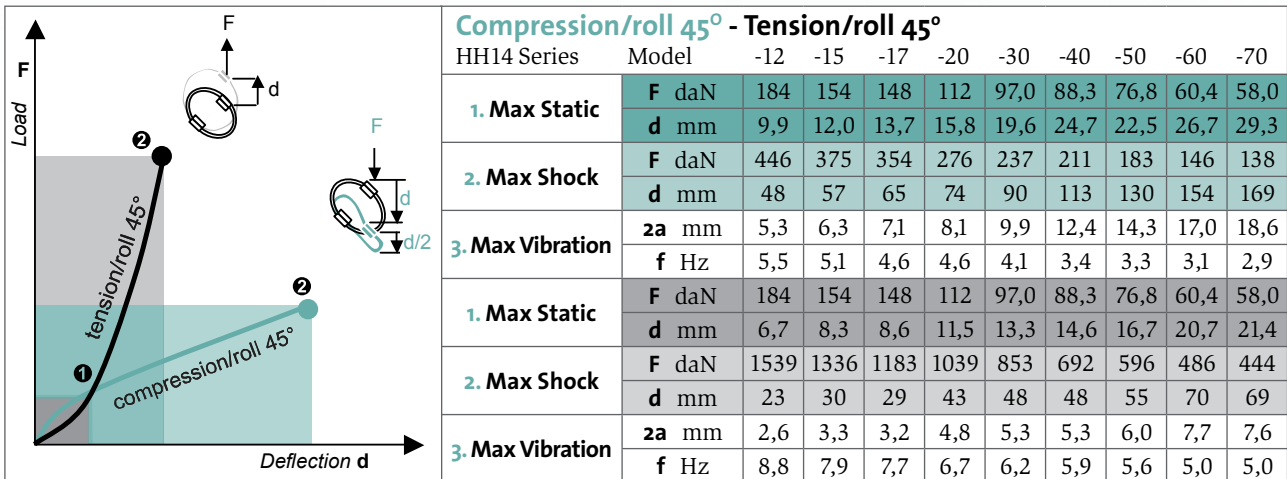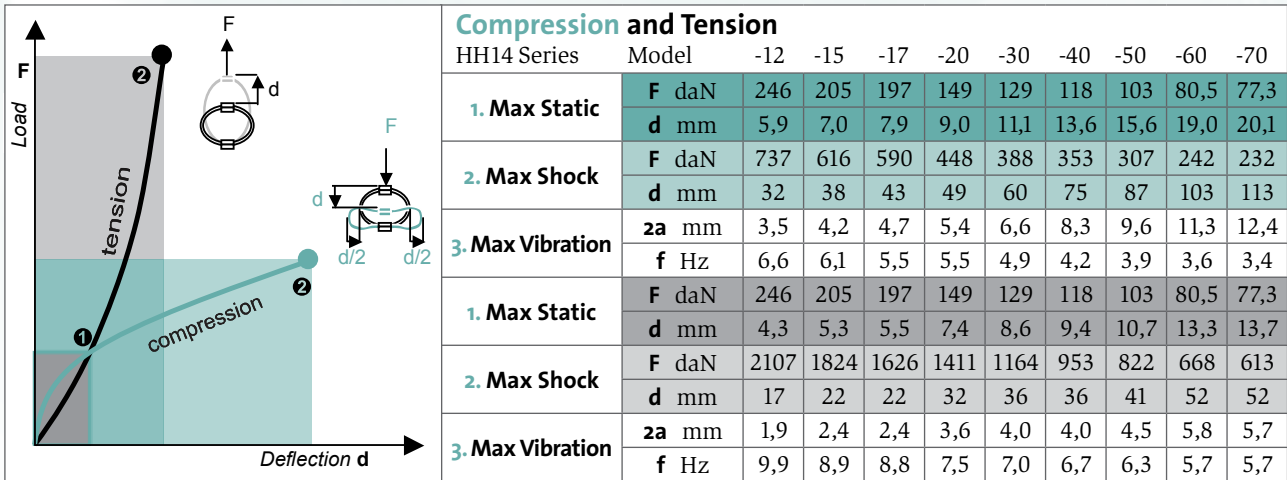

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.