

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
HH16
Cable: stainless steel (galvanised HHG16)
Retainer bars: aluminium alloy/SurTec
Screws alloy steel/zinc plate
Inserts: stainless steel. All stainless steel version HHSS16
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-15	98	115	2,55
-17	104	125	2,70
-20	110	135	2,90
-25	117	145	3,10
-30	125	160	3,30
-40	135	175	3,50
-50	145	185	3,65
-60	160	200	3,90
-70	175	215	4,15

Interfaces	Bar 1		
	fixtures holes D	2 through holes ø 13,5mm	2 through holes ø 13,5mm countersunk 90°
Bar 2			
2 through holes ø 13,5mm	TM2	not standard	not standard
2 through holes ø 13,5mm countersunk 90°	TCM	CM2	not standard
2 inserts M12	TIM	CIM	IM2



Example HH16-30CIM



Prefix: 'half helical' mount from the HH16 series




Model: -30 height: 125mm width: 160mm mass: 3,30kg 4 loops

Model: -30-02 = = = 2 loops

Suffix: CIM 2 through holes ø 13,5mm countersunk 90° in bar 1, 2 inserts M12 in bar 2



Note: Standard models in this series have 4 loops

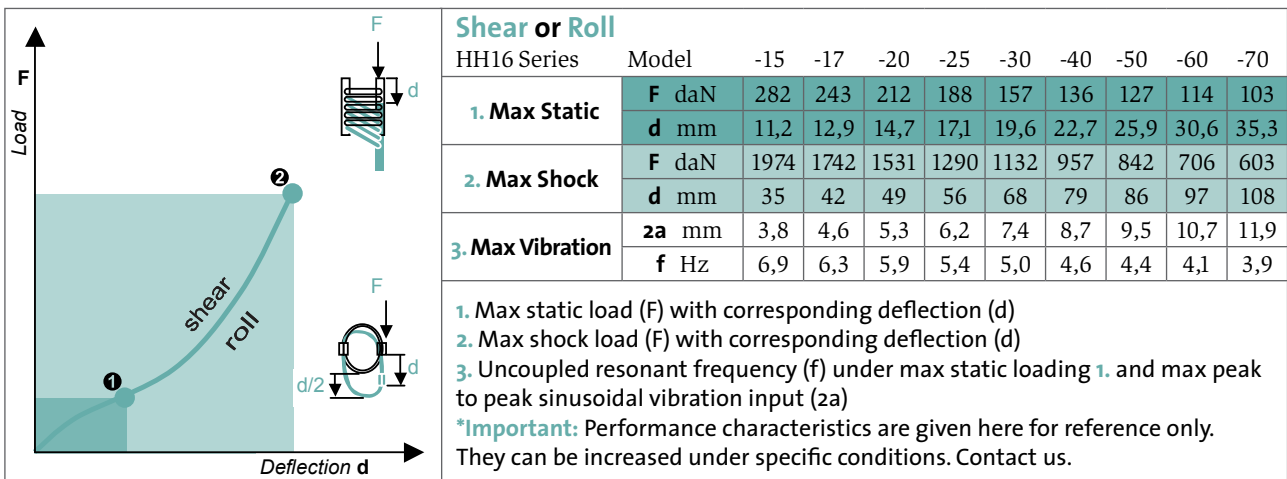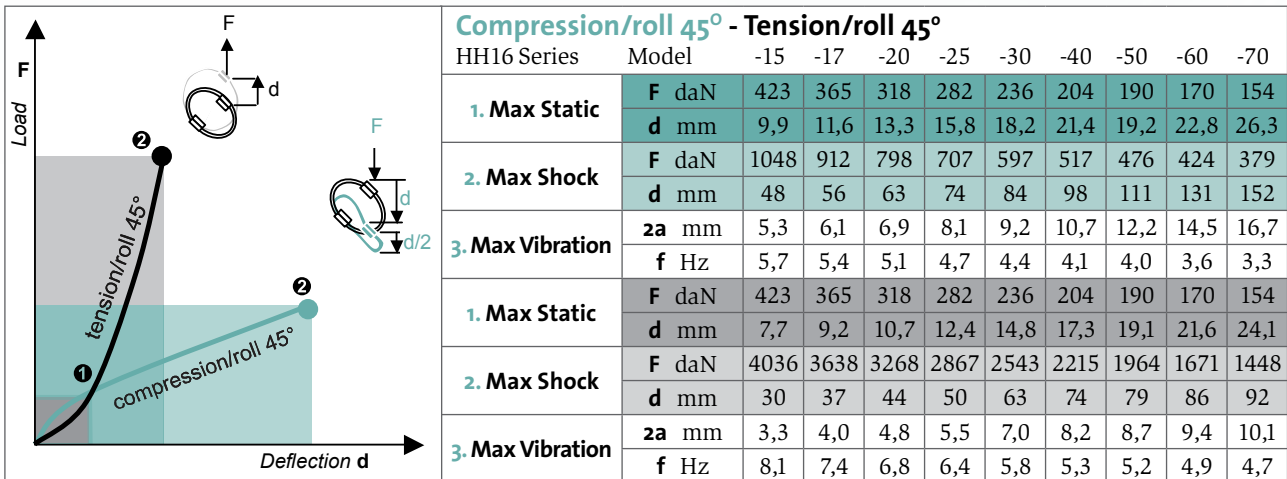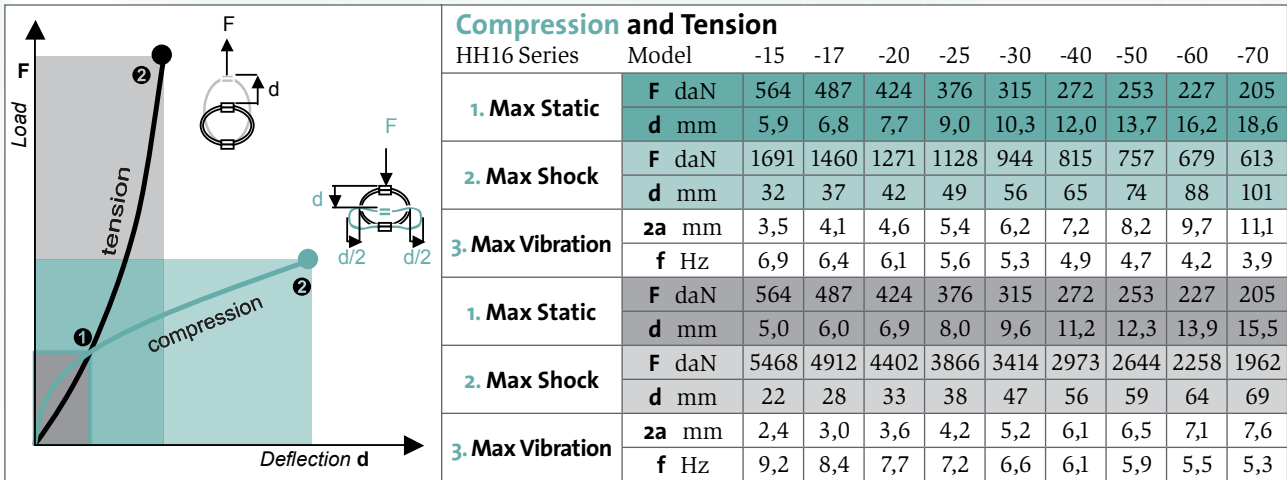

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.