

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
HH8
Cable: stainless steel (galvanised HHG8)
Retainer bars: aluminium alloy/SurTec
Screws alloy steel/zinc plate
Inserts: stainless steel. All stainless steel version HHSS8
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-10	45	54	0,17
-20	51	61	0,18
-25	56	69	0,20
-30	60	78	0,21
-35	60	87	0,22
-38	64	93	0,23
-40	64	98	0,24
-50	79	106	0,25




Interfaces	Bar 1		
	fixtures holes D	2 through holes ø 7mm	2 through holes ø 7mm countersunk 90°
Bar 2			
2 through holes ø 7mm	TM2	not standard	not standard
2 through holes ø 7mm countersunk 90°	TCM	CM2	not standard
2 inserts M6	TIM	CIM	IM2

Example HH8-30CIM

H	H	8	-	3	0	C	I	M
----------	----------	----------	----------	----------	----------	----------	----------	----------

- Prefix: 'half helical' mount from the HH8 series
- Model: -30 height: 60mm width: 78mm mass: 0,21kg 4 loops
- Model: -30-02 = = = 2 loops
- Suffix: CIM 2 through holes ø 7mm countersunk 90° in bar 1, 2 inserts M6 in bar 2

Note: Standard models in this series have 4 loops

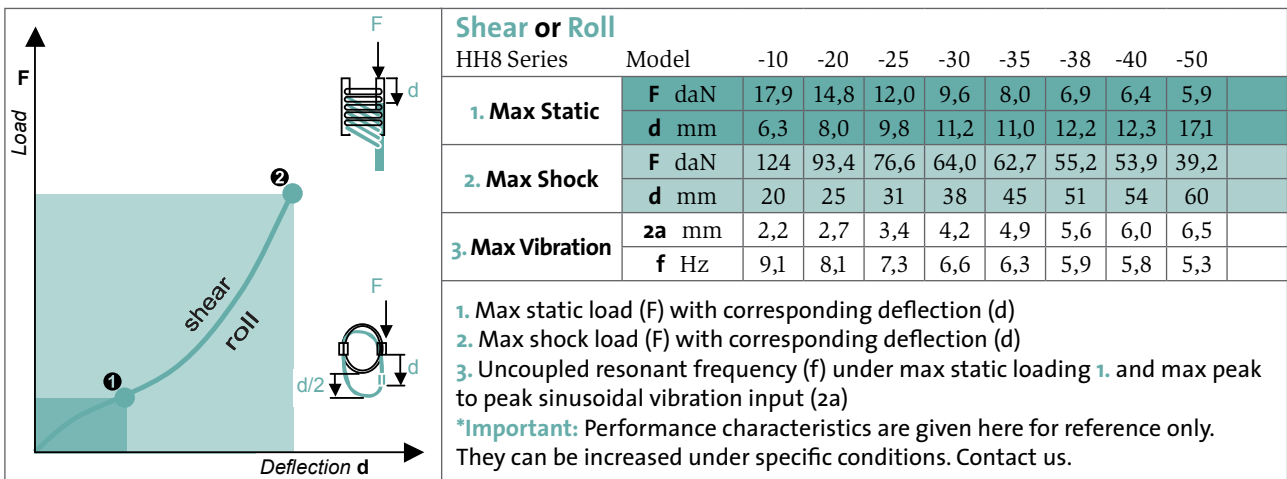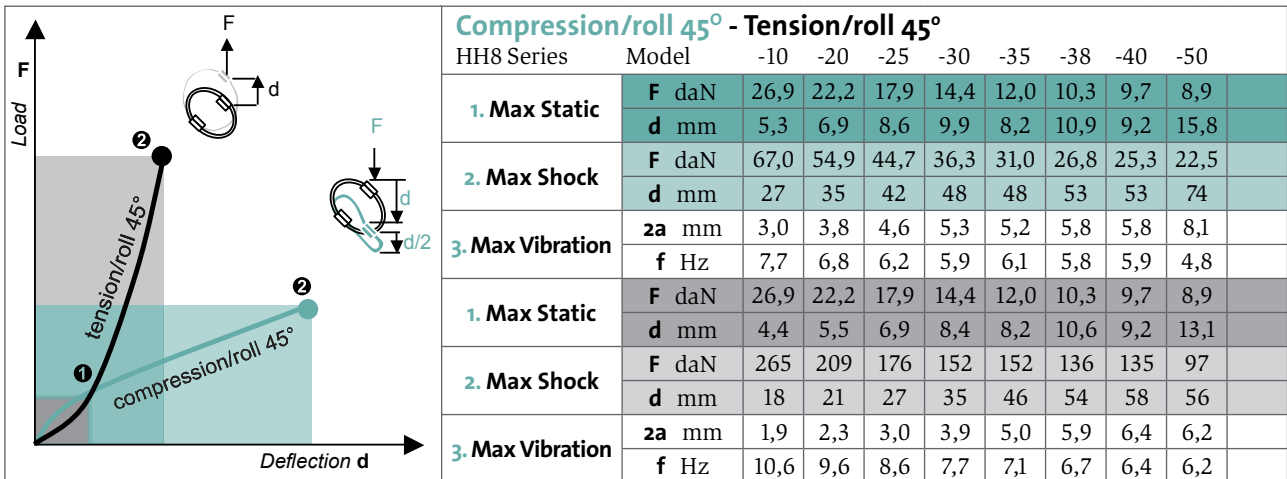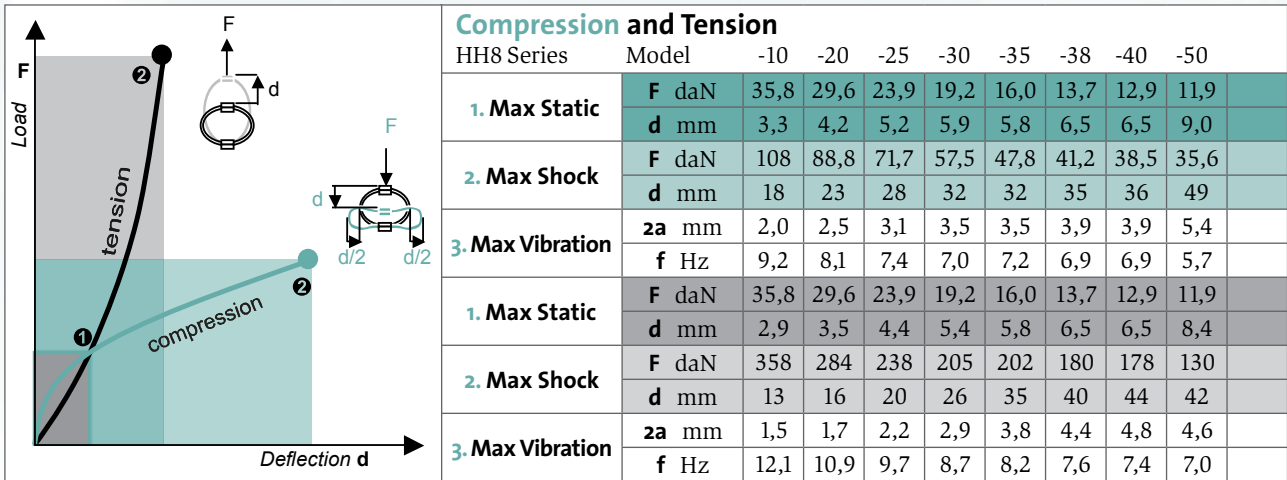

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.