

- All metal multidirectional anti-vibration/shock mounts.
 - Exceptional reliability and long life.
 - High damping.
 - No ageing.
 - Corrosion resistant.
 - Unequalled temperature range : -180°C +300°C.
 - Great adaptability/versatility.
- Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
HH9
Cable: stainless steel (galvanised HHG9)
Retainer bars: aluminium alloy/SurTec
Screws alloy steel/zinc plate
Inserts: stainless steel. All stainless steel version HHSS9
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-10	45	56	0,19
-20	51	63	0,20
-25	56	71	0,22
-30	60	80	0,23
-35	60	89	0,24
-38	64	95	0,25
-40	64	100	0,27
-50	79	108	0,29




Interfaces	Bar 1		
	fixtures holes D	2 through holes ø 7mm	2 through holes ø 7mm countersunk 90°
Bar 2			
2 through holes ø 7mm	TM2	not standard	not standard
2 through holes ø 7mm countersunk 90°	TCM	CM2	not standard
2 inserts M6	TIM	CIM	IM2

Example HH9-30CIM

H	H	9	-	3	0	C	I	M
----------	----------	----------	----------	----------	----------	----------	----------	----------

- Prefix:** 'half helical' mount from the HH9 series
- Model: -30**
height: 60mm
width: 80mm
mass: 0,23kg
4 loops
- Model: -30-02**
=
=
=
2 loops
- Suffix: CIM**
2 through holes ø 7mm countersunk 90° in bar 1,
2 inserts M6 in bar 2

Note: Standard models in this series have 4 loops

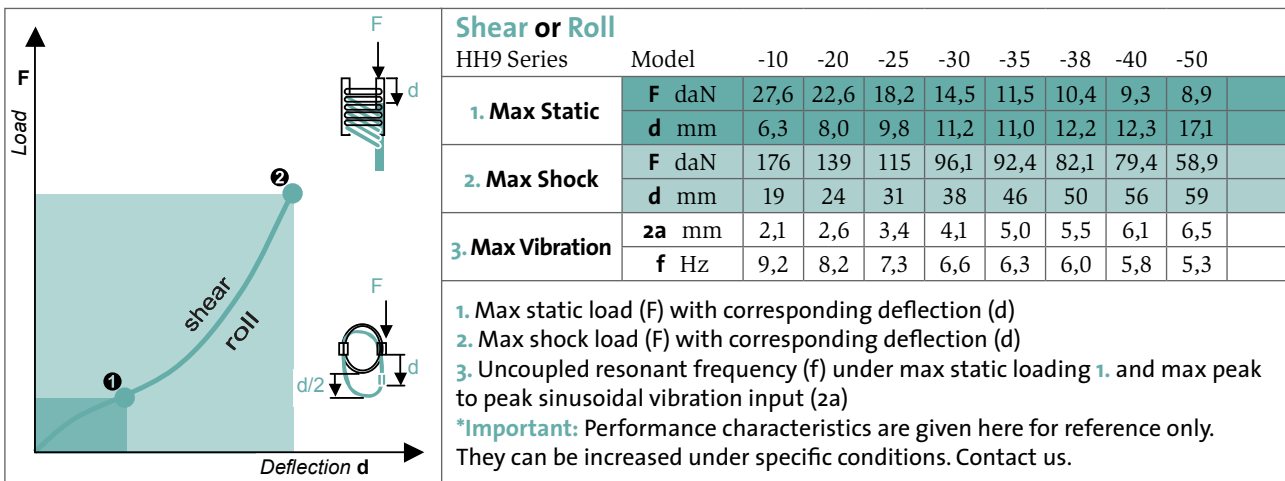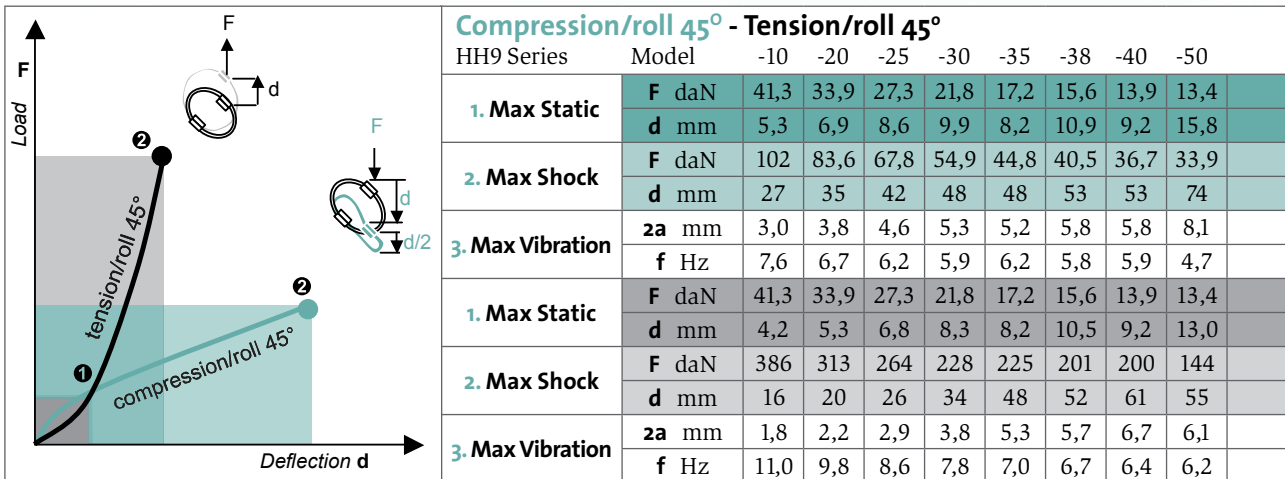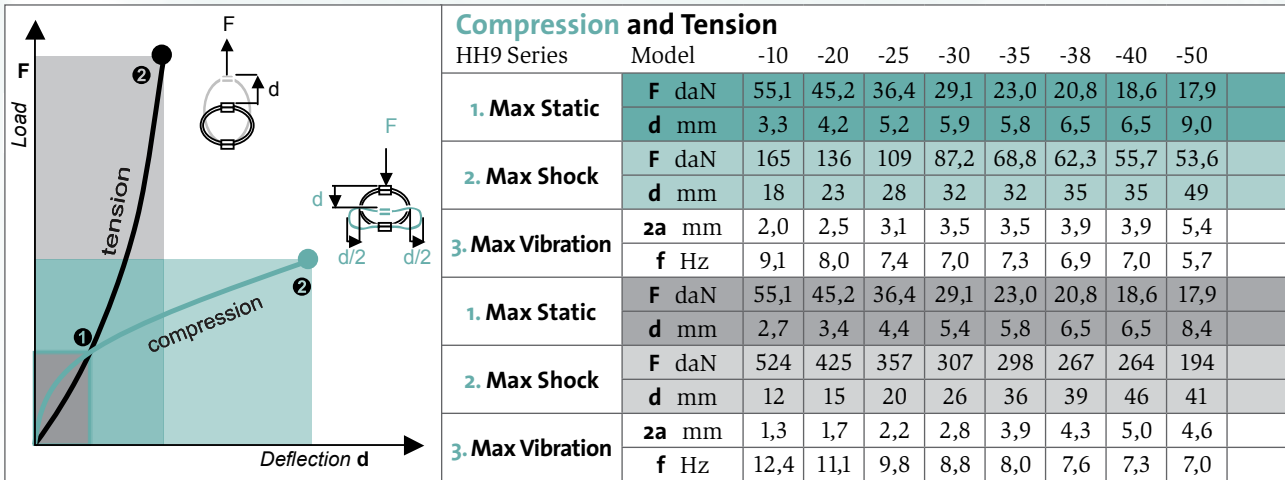

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.