

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
C1260
Cable: stainless steel
Retainer bars: aluminium alloy/ SurTec
Clips: stainless steel
Inserts: alloy steel/ zinc plate
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-13	51	58	0,27
-16	53	63	0,28
-18	52	70	0,29
-20	55	74	0,30
-39	57	80	0,31
-50	82	106	0,39




Interfaces	Bar 1		
fixtures holes D	3 through holes ø 6,4mm	3 through holes ø 6,4mm countersunk 90°	3 inserts M6
Bar 2			
3 through holes ø 6,4mm	no suffix	not standard	not standard
3 through holes ø 6,4mm countersunk 90°	CM	CM2	not standard
3 inserts M6	IM	CIM	IM2

Example C1260-20CM2

C	1	2	6	0	-	2	0	C	M	2
----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

- Prefix:** 'helical' mount from the C1260 series
- Model: -20** height: 55mm width: 74mm mass: 0,30kg 11 loops
- Model: 20-08** = = = 8 loops
- Suffix: CM2** 3 through holes ø 6,4mm countersunk 90° in the bars 1 and 2

Note: Standard models in this series have 11 loops

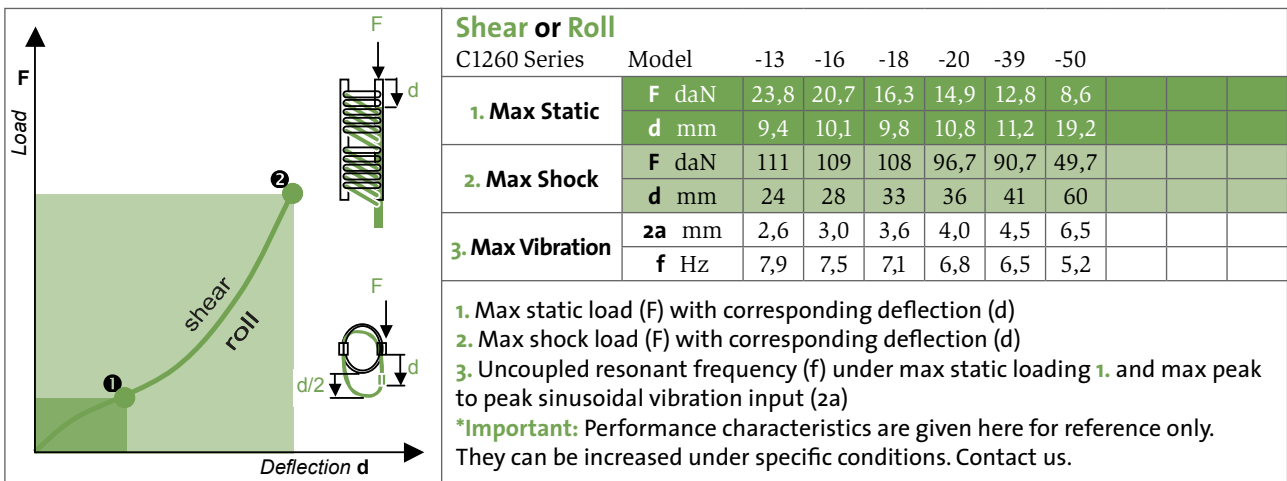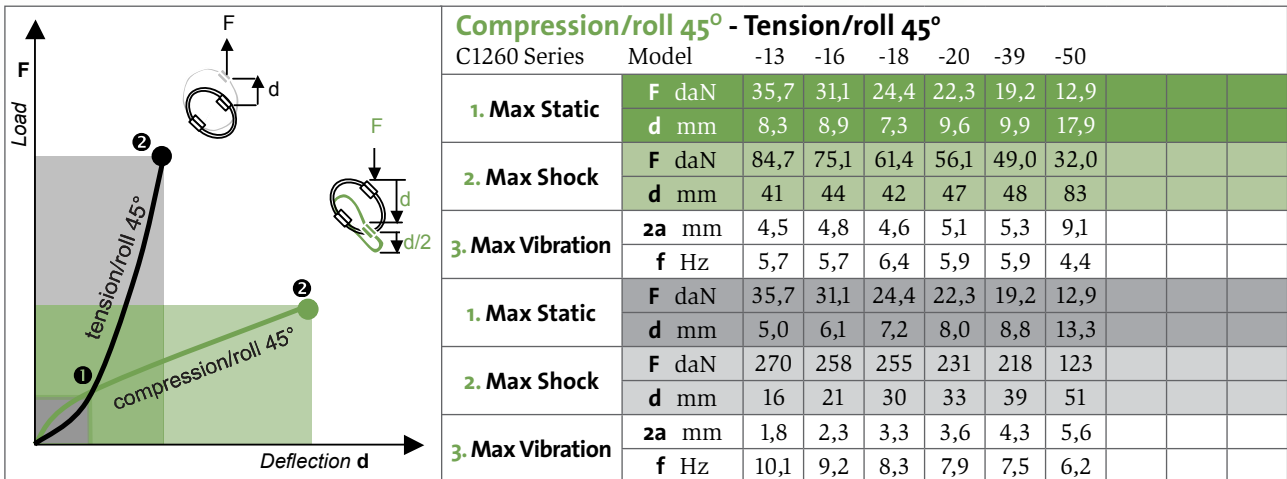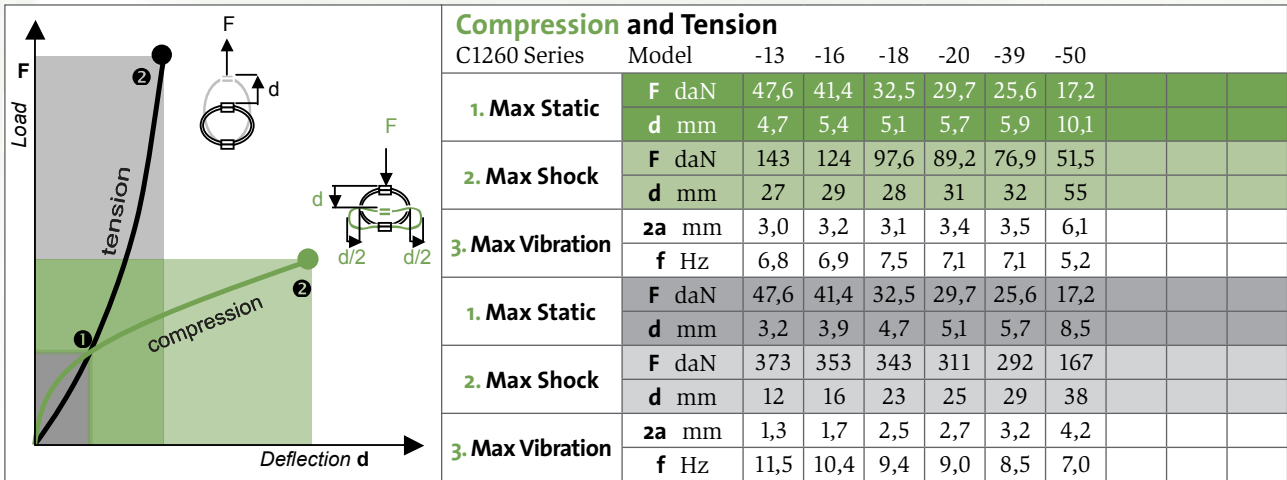

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.