

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.


Series
Materials and finishes (meets RoHS requirements)
CB1290
Cable: stainless steel (galvanised CBG1290)
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-10	48	59	0,34
-20	54	66	0,37
-25	59	74	0,39
-30	63	83	0,41
-35	63	92	0,43
-38	67	98	0,45
-40	67	103	0,46
-50	82	111	0,50

Interfaces	Bar 1		
	fixtures holes D	2 through holes ø 6,4mm	2 through holes ø 6,4mm countersunk 90°
Bar 2			
2 through holes ø 6,4mm	no suffix	not standard	not standard
2 through holes ø 6,4mm countersunk 90°	CM	CM2	not standard
2 inserts M6	IM	CIM	IM2



Example
CB1290-25CM



Prefix: 'helical' mount from the CB1290 series




Model: -25 height: 59mm width: 74mm mass: 0,39kg 8 loops

Model: -25-06 = = = 6 loops

Suffix: CM 2 through holes ø 6,4mm in the bars 1 and 2. countersunk 90° in bar 2



Note: Standard models in this series have 8 loops

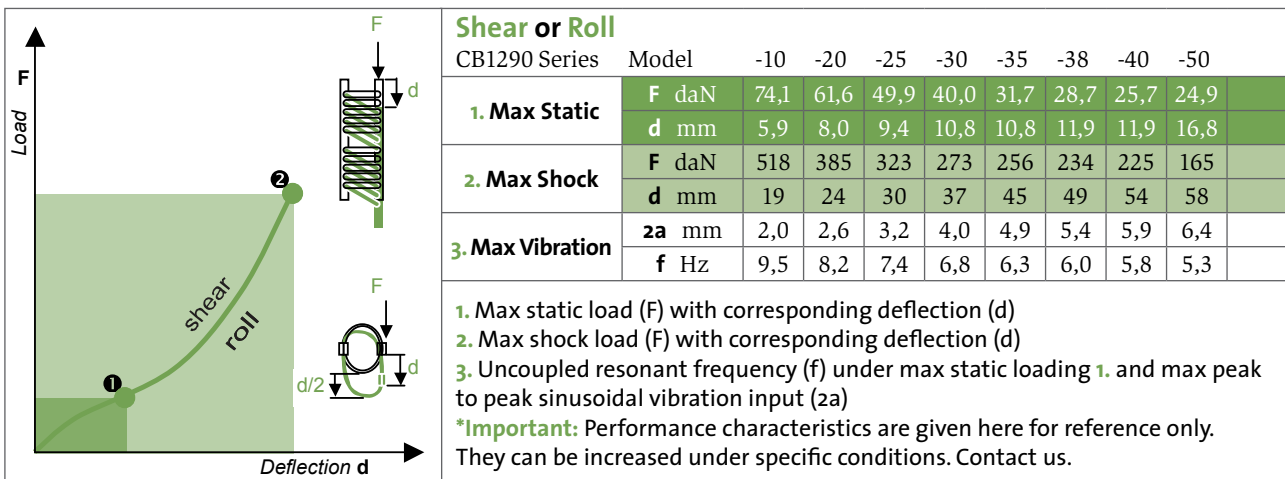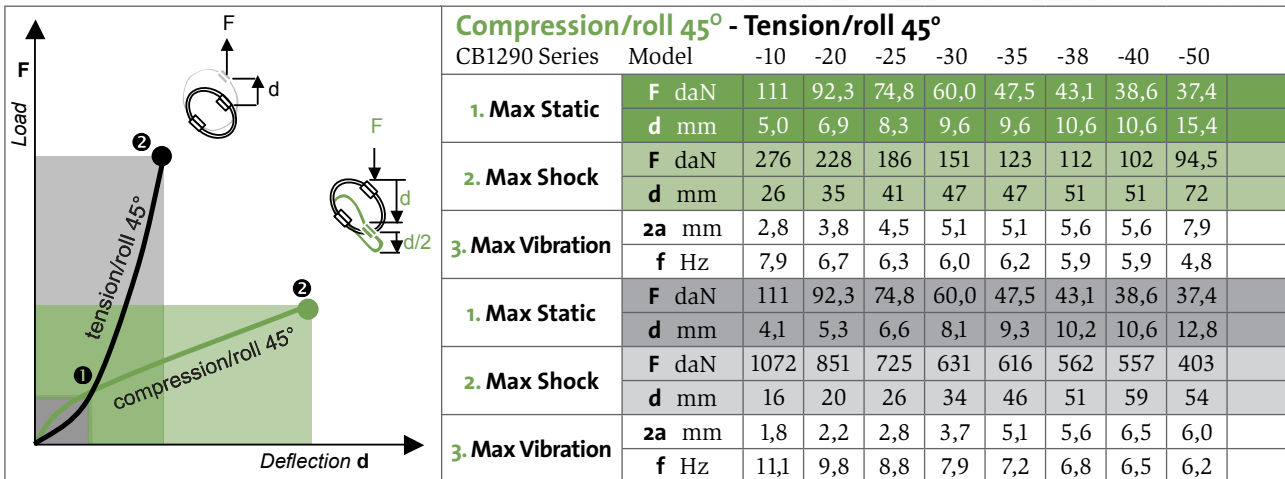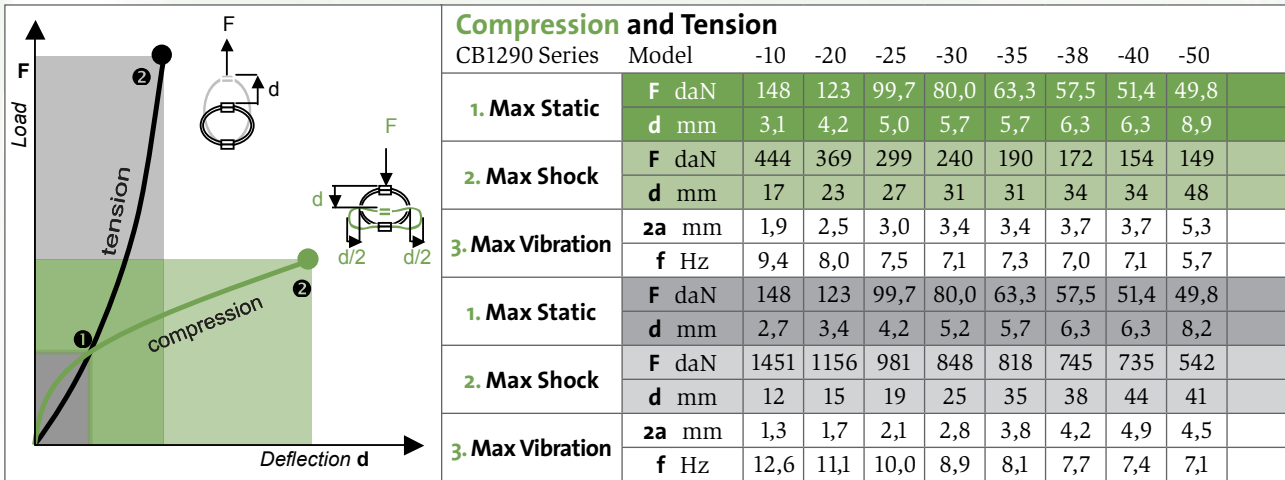

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.