

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
CB1500
Cable: stainless steel (galvanised CBG1500)
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-12	89	102	3,0
-15	96	112	3,2
-17	100	120	3,4
-20	109	135	3,7
-30	119	152	4,0
-40	127	165	4,3
-50	135	178	4,5
-60	146	185	4,8

Interfaces	Bar 1		
fixtures holes D	4 through holes ø 10,5mm	4 through holes ø 10,5mm countersunk 90°	4 inserts M10
Bar 2	no suffix	not standard	not standard
4 through holes ø 10,5mm	CM	CM2	not standard
4 through holes ø 10,5mm countersunk 90°	IM	CIM	IM2



Example
CB1500-20IM2



Prefix:
'helical' mount from the CB1500 series




Model: -20
height: 109mm
width: 135mm
mass: 3,7kg
8 loops

Model: -20-06
=
=
=
6 loops

Suffix: IM2
4 inserts M10 in bars 1 and 2



Note: Standard models in this series have 8 loops

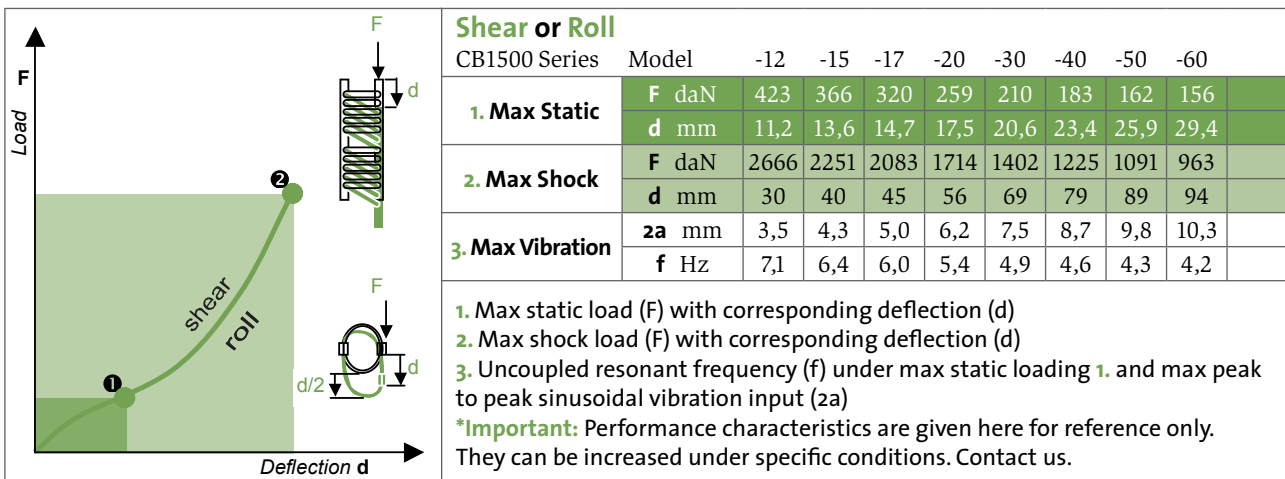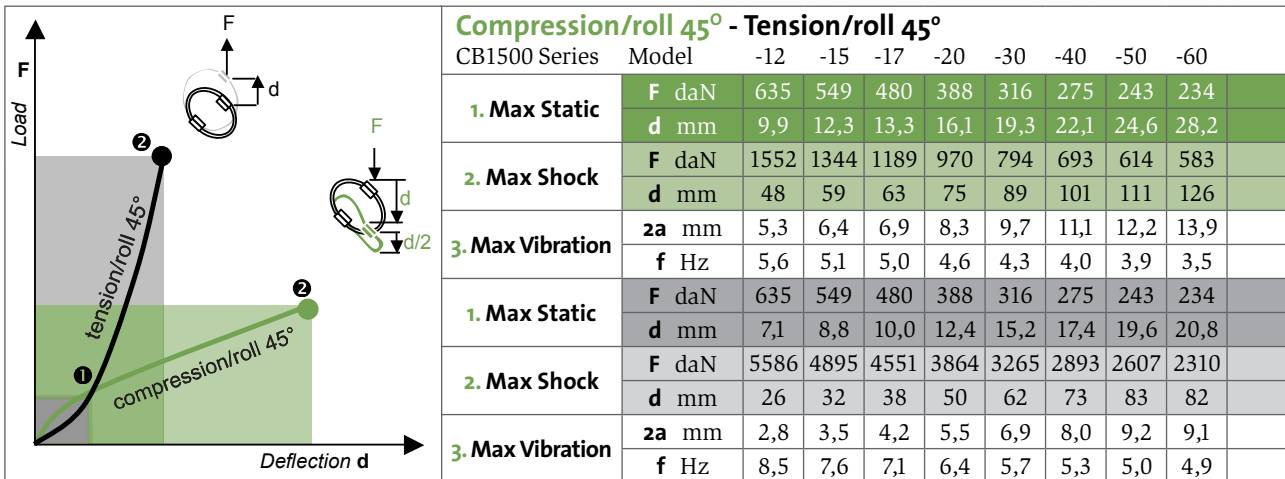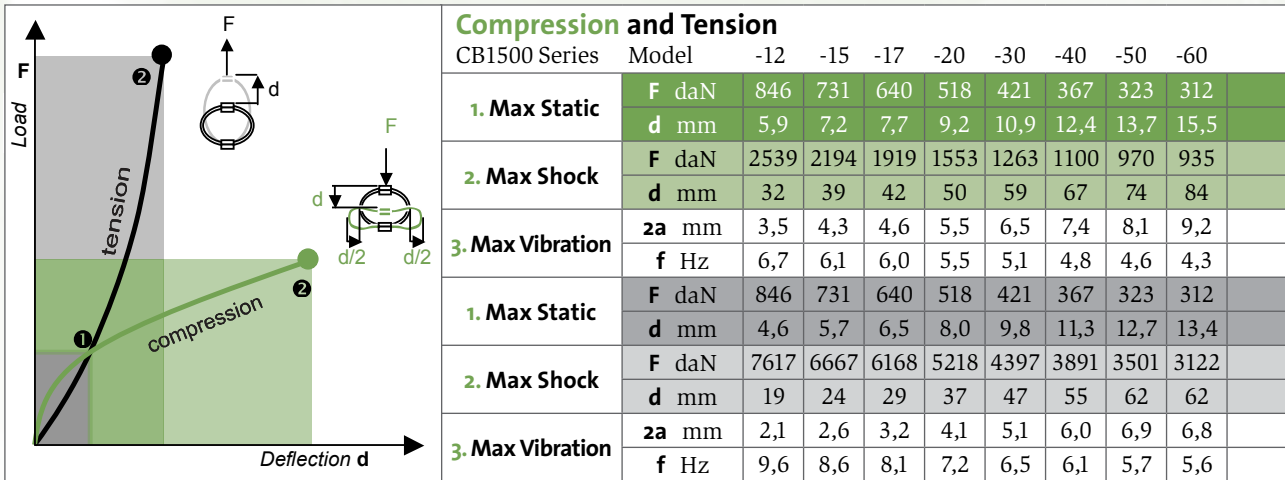

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.