

- All metal multidirectional anti-vibration/shock mounts.
 - Exceptional reliability and long life.
 - High damping.
 - No ageing.
 - Corrosion resistant.
 - Unequalled temperature range : -180°C +300°C.
 - Great adaptability/versatility.
- Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
CB1700
Cable: stainless steel (galvanised CBG1700)
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-15	133	140	8,4
-17	152	165	9,5
-20	159	178	9,9
-30	190	210	11,5
-40	216	235	12,7




Interfaces	Bar 1		
	fixtures holes D	4 through holes ø 13.4mm	4 through holes ø 13.4mm countersunk 90°
Bar 2			
4 through holes ø 13.4mm	no suffix	not standard	not standard
4 through holes ø 13.4mm countersunk 90°	CM	CM2	not standard
4 inserts M12	IM	CIM	IM2

Example CB1700-15IM2

C	B	1	7	0	0	-	1	5	I	M	2
----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

- Prefix: 'helical' mount from the **CB1700** series
- Model: -15 height: 133mm width: 140mm mass: 8,4kg 8 loops
- Model: -15-06 = = = 6 loops
- Suffix: IM2 4 inserts M12 in bars 1 and 2

Note: Standard models in this series have 8 loops

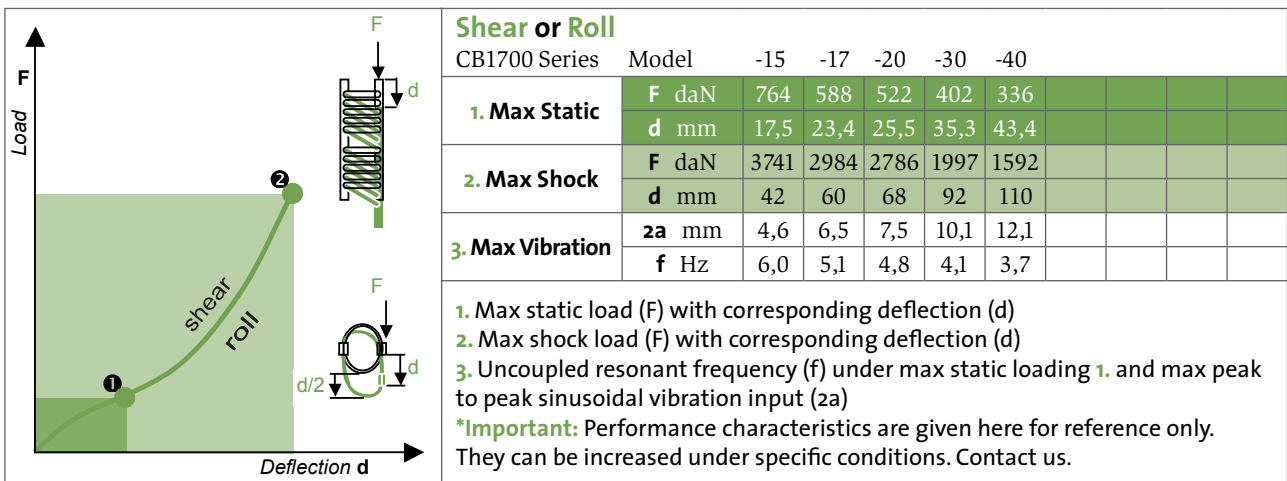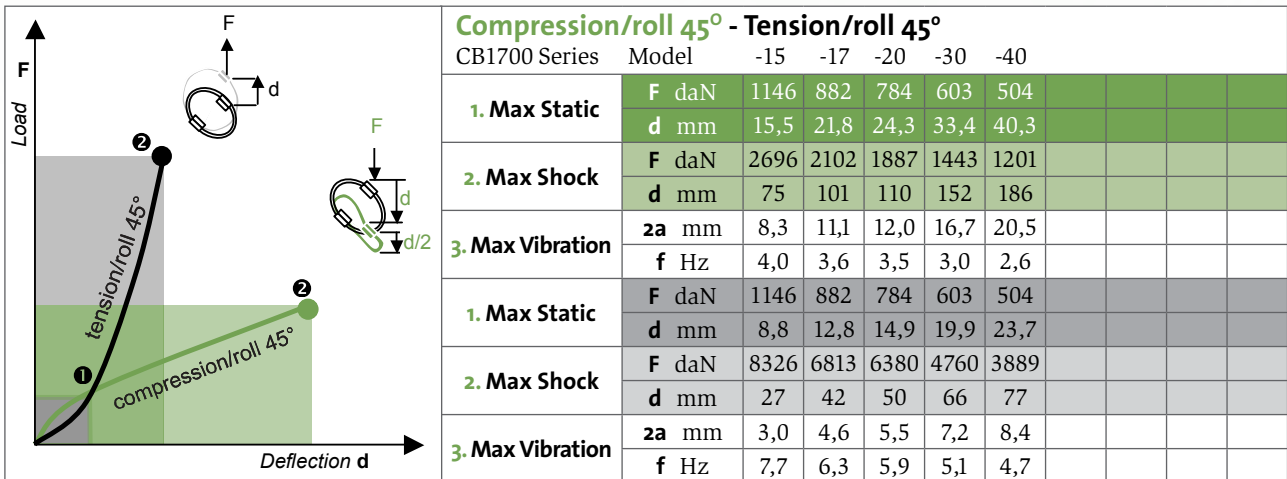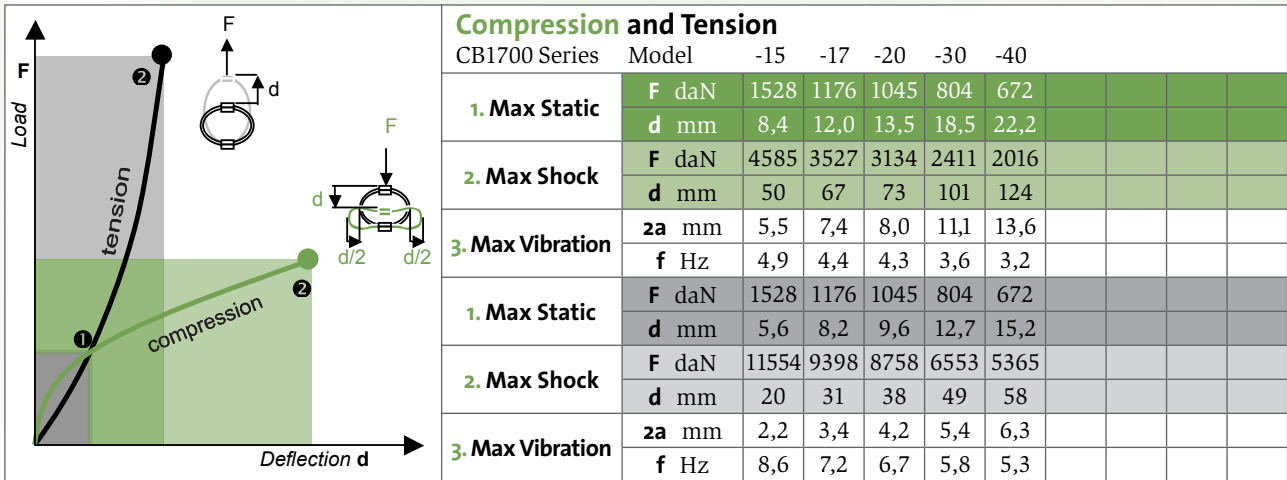

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.