

- All metal multidirectional anti-vibration/shock mounts.
  - Exceptional reliability and long life.
  - High damping.
  - No ageing.
  - Corrosion resistant.
  - Unequalled temperature range : -180°C +300°C.
  - Great adaptability/versatility.
- Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

<b>Series</b>
Materials and finishes (meets RoHS requirements)
<b>CB2000</b>
<b>Cable:</b> stainless steel (galvanised CBG2000)
<b>Retainer bars:</b> aluminium alloy/ SurTec
<b>Screws:</b> alloy steel/ zinc plate
<b>Inserts:</b> stainless steel
Other materials on request

<b>Model</b>	height h (mm)	width w (mm)	mass (kg)
-10	178	210	24
-12	216	248	27
-15	235	270	28

<b>Interfaces</b>	<b>Bar 1</b>		
fixtures holes D	4 through holes ø 19mm	4 through holes ø 19mm countersunk 90°	4 inserts M18
<b>Bar 2</b>			
4 through holes ø 19mm	no suffix	not standard	not standard
4 through holes ø 19mm countersunk 90°	CM	CM2	not standard
4 inserts M18	IM	CIM	IM2

Example CB2000-10IM2

C	B	2	0	0	0	-	1	0	I	M	2
---	---	---	---	---	---	---	---	---	---	---	---




Prefix: 'helical' mount from the CB2000 series

Model: -10 height: 178mm width: 210mm mass: 24kg 8 loops

Model: -10-06 = = = 6 loops

Suffix: IM2 4 inserts M18 in bars 1 and 2

Note: Standard models in this series have 8 loops

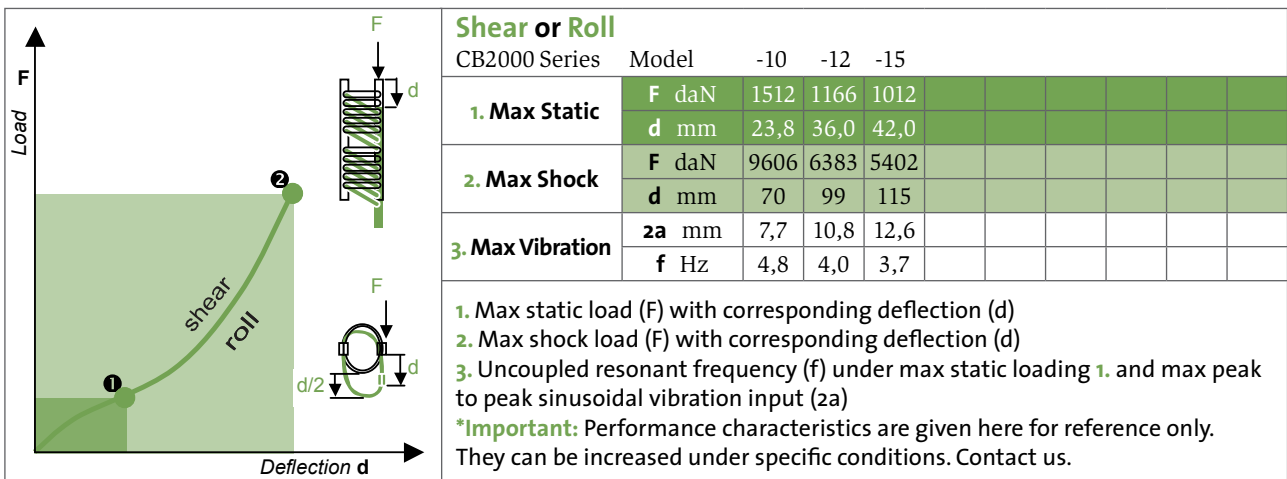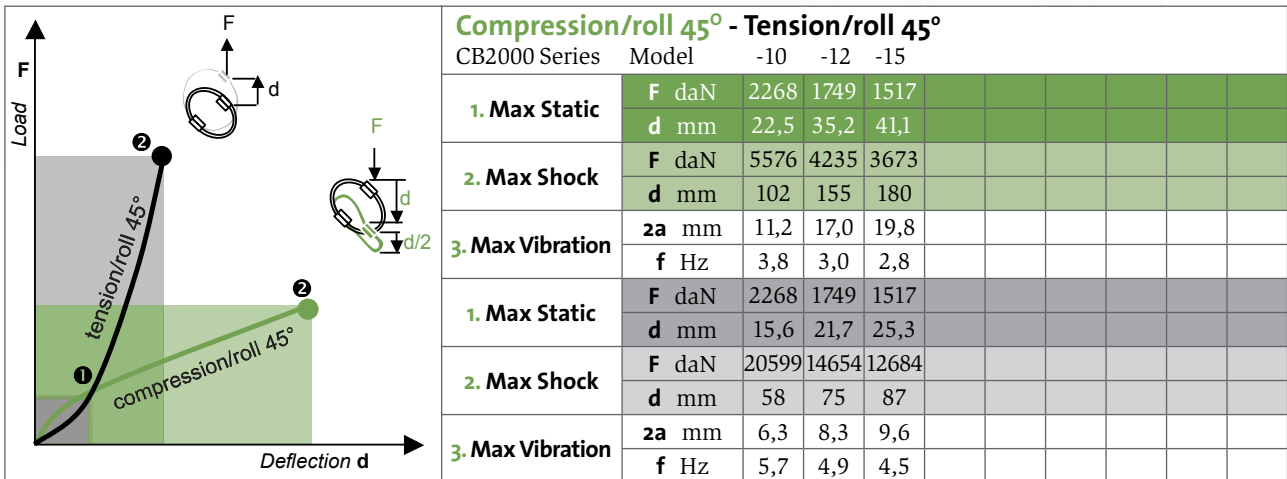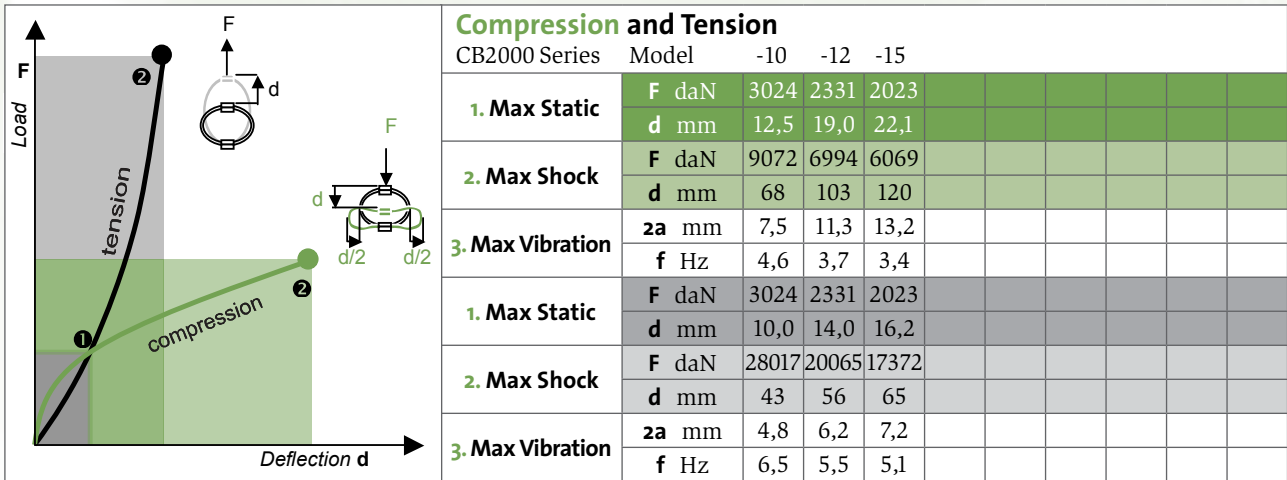

**Typical shock/vibration specifications:**

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.