

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
C3H
Cable: stainless steel
Retainer bars: aluminium alloy/ SurTec
Clips: stainless steel
Inserts: alloy steel/ zinc plate
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
310	23	28	0,07
410	25	30	0,07
510	28	33	0,07
610	33	38	0,07
710	36	41	0,08
810	38	43	0,08
910	40	46	0,08
1010	44	49	0,08

Interfaces	Bar 1		
	fixtures holes D	2 through holes ø 5,3mm	2 through holes ø 5,3mm countersunk 90°
Bar 2			
2 through holes ø 5,3mm	no suffix	not standard	not standard
2 through holes ø 5,3mm countersunk 90°	CM	CM2	not standard
2 inserts M5	IM	CIM	IM2

Example C3H610CIM

C	3	H	6	1	0	C	I	M
----------	----------	----------	----------	----------	----------	----------	----------	----------




Prefix: 'helical' mount from the C3H series

Model: 610
height: 33mm
width: 38mm
mass: 0,07kg
10 loops

Model: 6o8
=
=
= 8 loops

Suffix: CIM
2 through holes ø 5,3mm countersunk 90°
in the bar 1,
2 inserts M5 in bar 2

Note: Standard models in this series have 10 loops

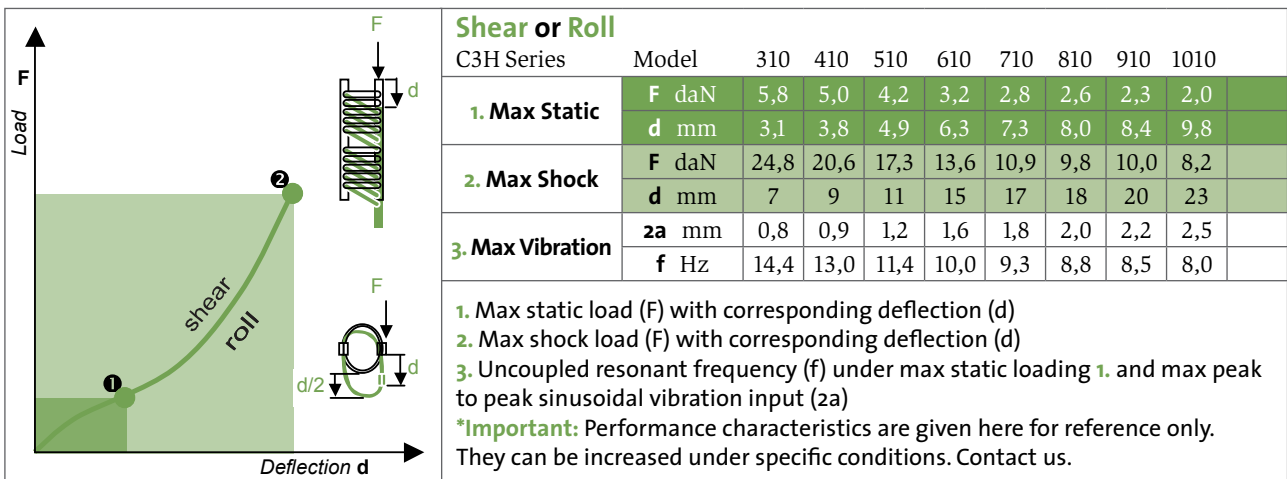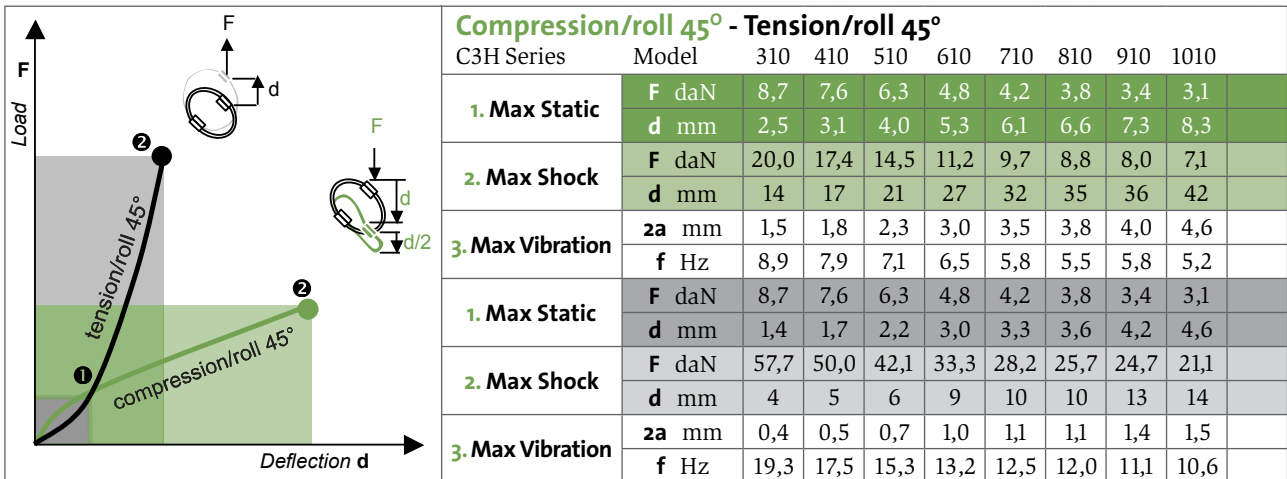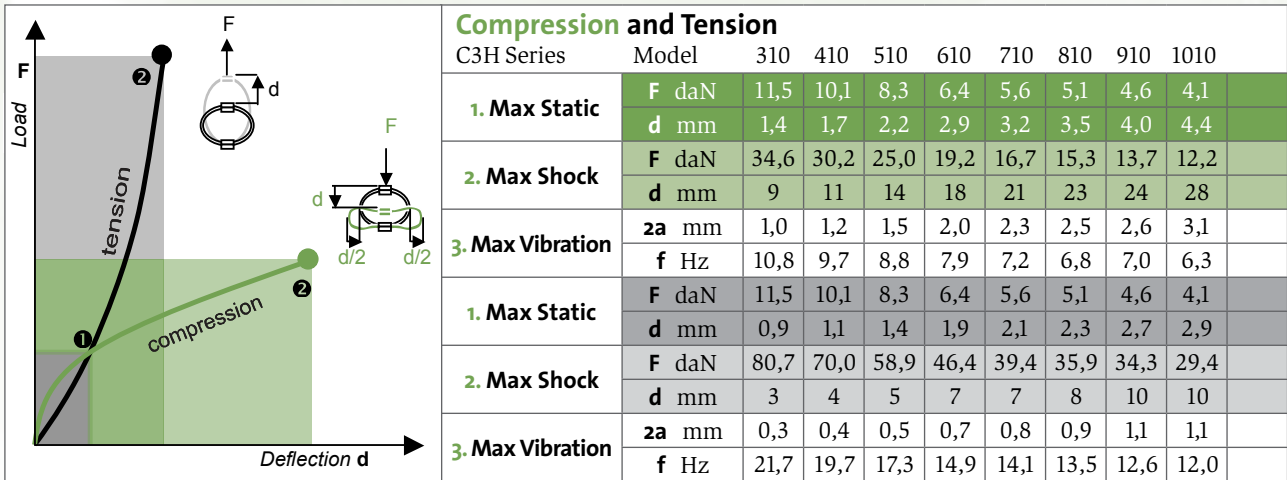

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.