

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range -180°C $+300^{\circ}\text{C}$.
- Cheap and quick prototypes from stock.

Dimensions are in mm. For reference only.


Series
Materials and finishes (meets RoHS requirements)
MP11
Cable: stainless steel
Interfaces: aluminium alloy
Insert: stainless steel.
Other materials on request

Model	height h (mm)	width u (mm)	width v (mm)	mass (kg)
-175	75	88	114	0,58
-200	84	91	122	0,60
-235	92	99	128	0,62
-270	106	110	135	0,66
-345	127	127	147	0,73

Interfaces	fixtures holes D
Top 1	1 through hole $\varnothing 9$ mm (option: Insert M12)
Bottom 2	2 through holes $\varnothing 9$ mm






Example MP11-270



Prefix: 'polycal' mount from the MP11 series

Model: -270 height: 106mm width u: 110mm width v: 135mm mass: 0,66kg



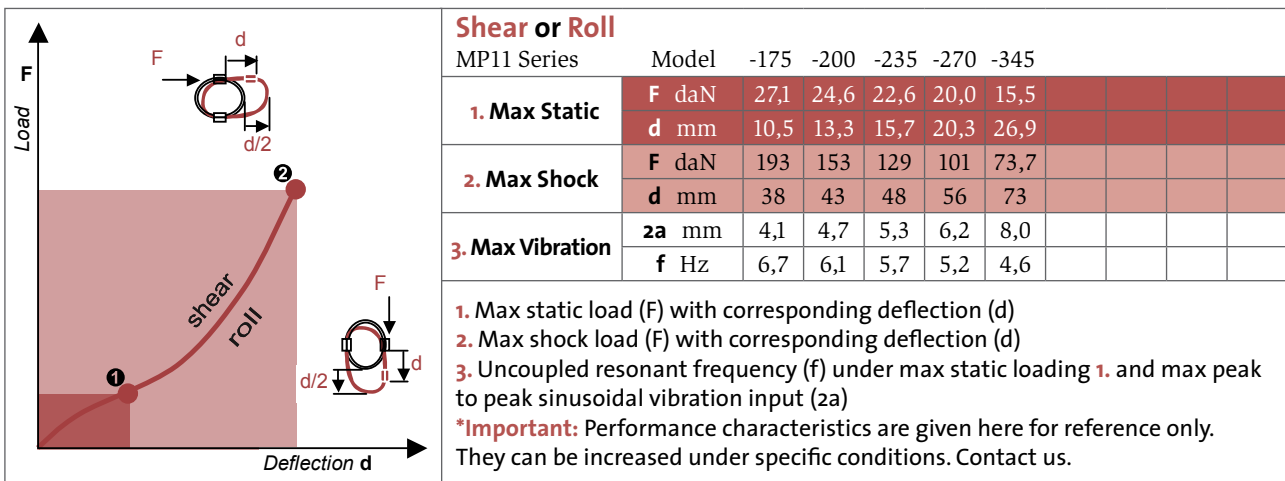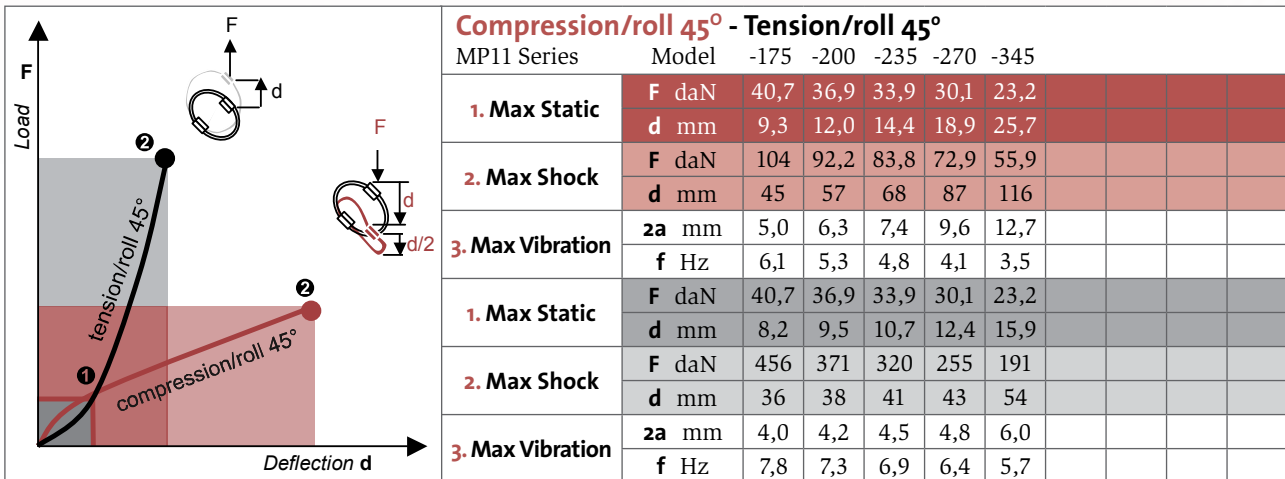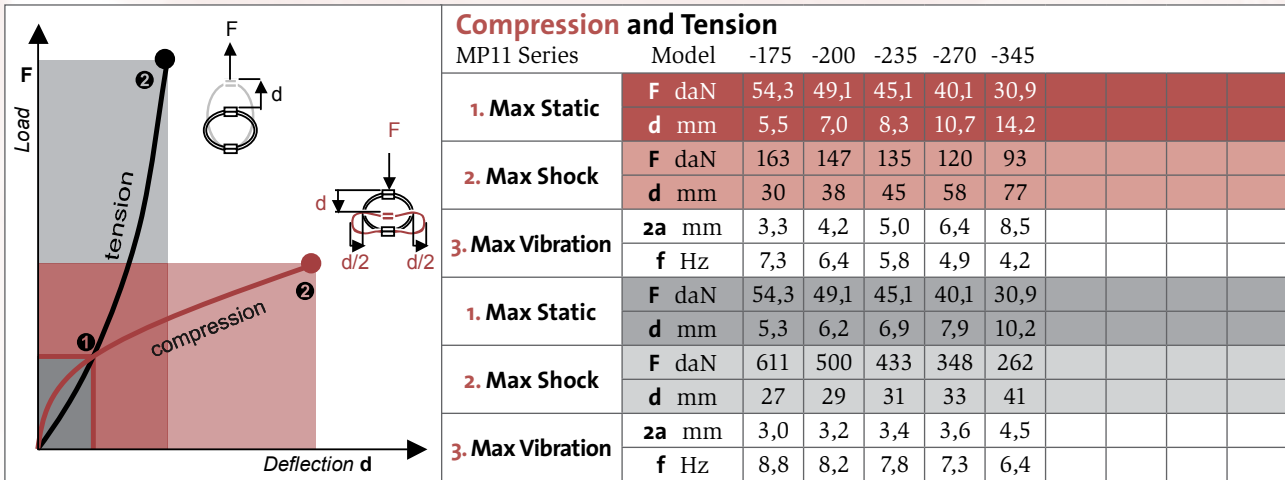

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.