

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range  $-180^{\circ}\text{C} +300^{\circ}\text{C}$ .
- Cheap and quick prototypes from stock.

Dimensions are in mm. For reference only.


<b>Series</b>
Materials and finishes (meets RoHS requirements)
<b>MP13</b>
<b>Cable:</b> stainless steel
<b>Interfaces:</b> aluminium alloy
<b>Insert:</b> stainless steel.
Other materials on request

<b>Model</b>	height h (mm)	width u (mm)	width v (mm)	mass (kg)
<b>-175</b>	77	90	116	0,53
<b>-200</b>	84	91	122	0,54
<b>-235</b>	90	96	125	0,56
<b>-270</b>	102	106	135	0,58
<b>-345</b>	128	128	146	0,65

<b>Interfaces</b>	fixtures holes D
<b>Top 1</b>	1 through hole $\varnothing 9$ mm (option: Insert M12)
<b>Bottom 2</b>	2 through holes $\varnothing 9$ mm






Example MP13-270



Prefix: 'polycal' mount from the MP13 series

Model: -270 height: 102mm width u: 106mm width v: 135mm mass: 0,58kg



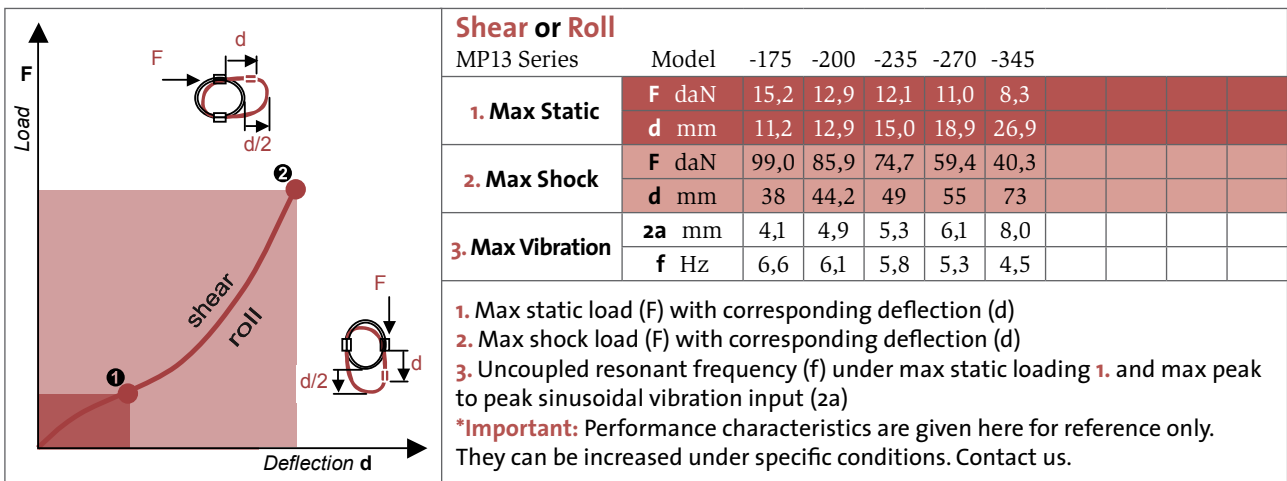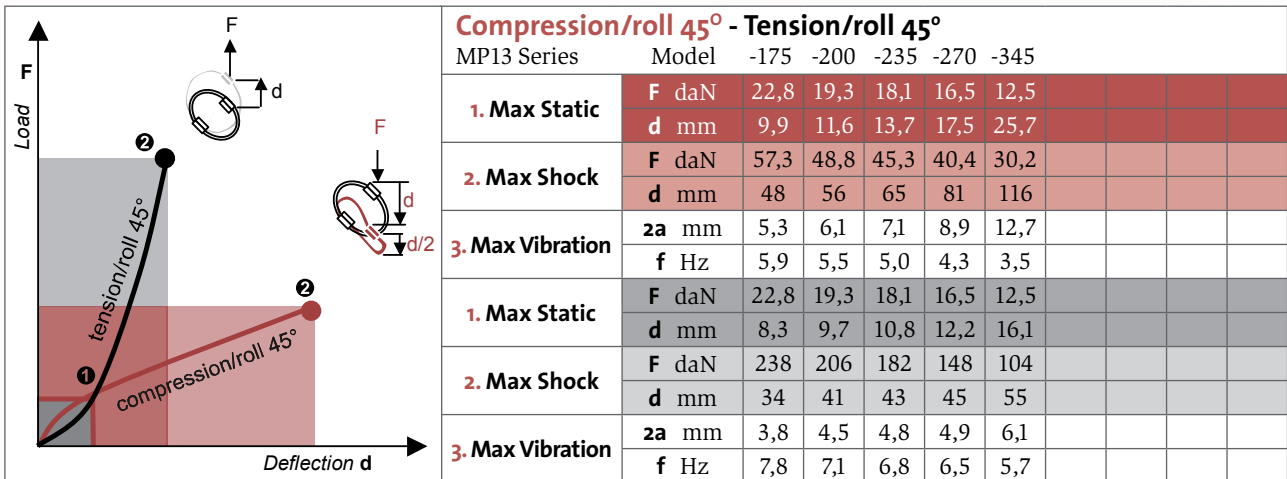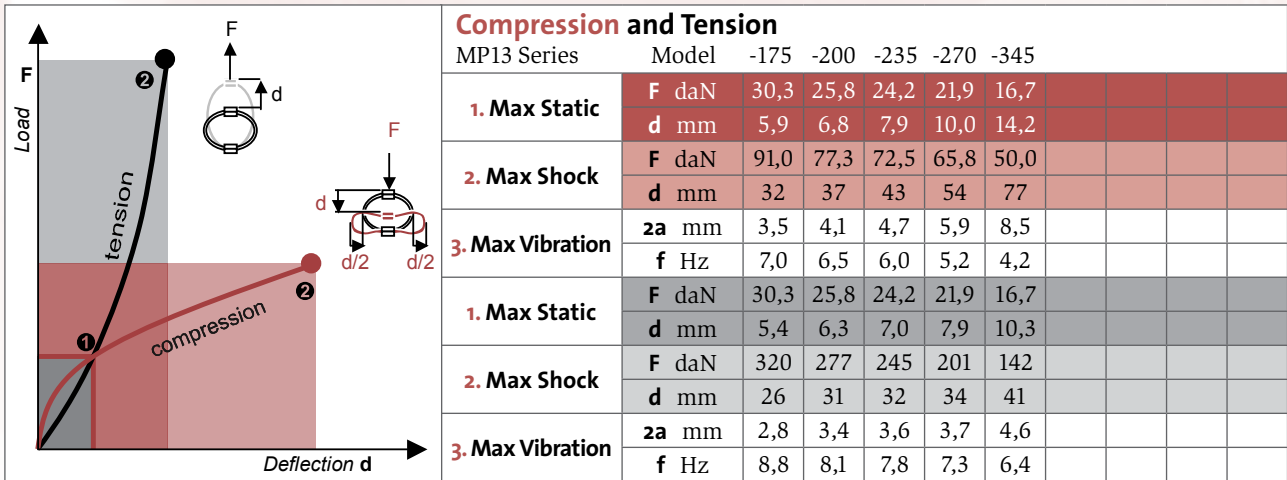

**Typical shock/vibration specifications:**

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.