

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range :-180°C +300°C.
- Cheap and quick prototypes from stock.

Dimensions are in mm. For reference only.

| |
|--|
| Series |
| Materials and finishes (meets RoHS requirements) |
| MP14 |
| Cable: stainless steel |
| Interfaces: aluminium alloy |
| Insert: stainless steel. |
| Other materials on request |

| | | | | |
|--------------|---------------|--------------|--------------|-----------|
| Model | height h (mm) | width u (mm) | width v (mm) | mass (kg) |
| -175 | 77 | 93 | 114 | 0,60 |
| -200 | 85 | 97 | 121 | 0,68 |
| -235 | 92 | 106 | 131 | 0,75 |
| -270 | 103 | 110 | 140 | 0,82 |
| -345 | 128 | 128 | 152 | 0,98 |
| -430 | 154 | 150 | 172 | 1,05 |
| | | | | |
| | | | | |
| | | | | |

| | |
|-------------------|---|
| Interfaces | fixtures holes D |
| Top 1 | 1 through hole ø9 mm (option: Insert M12) |
| Bottom 2 | 2 through holes ø9 mm |






Example MP14-270



Prefix: 'polycal' mount from the MP14 series

Model: -270 height: 103mm width u: 110mm width v: 140mm mass: 0,82kg



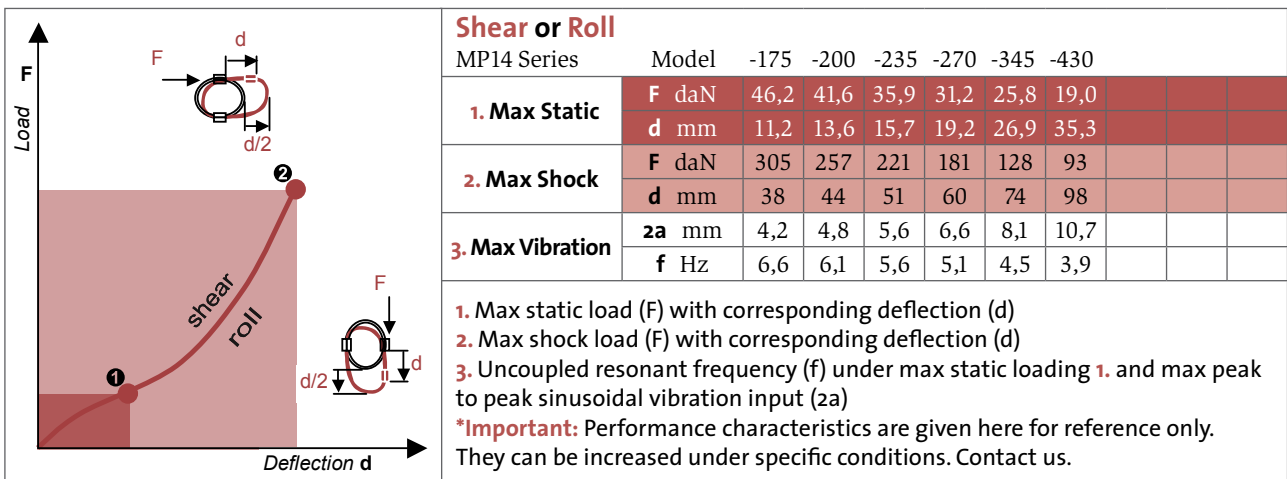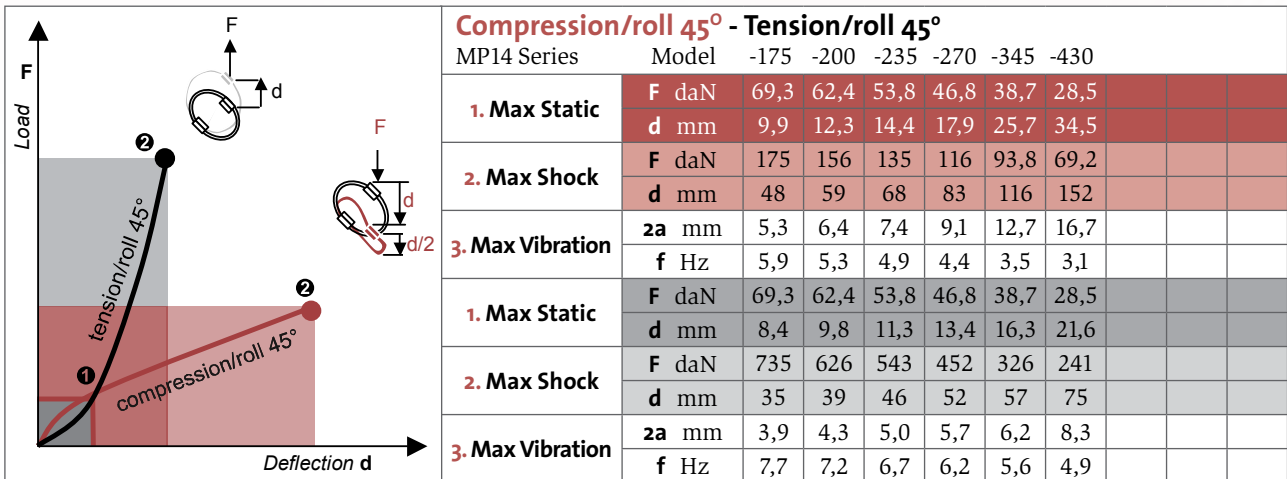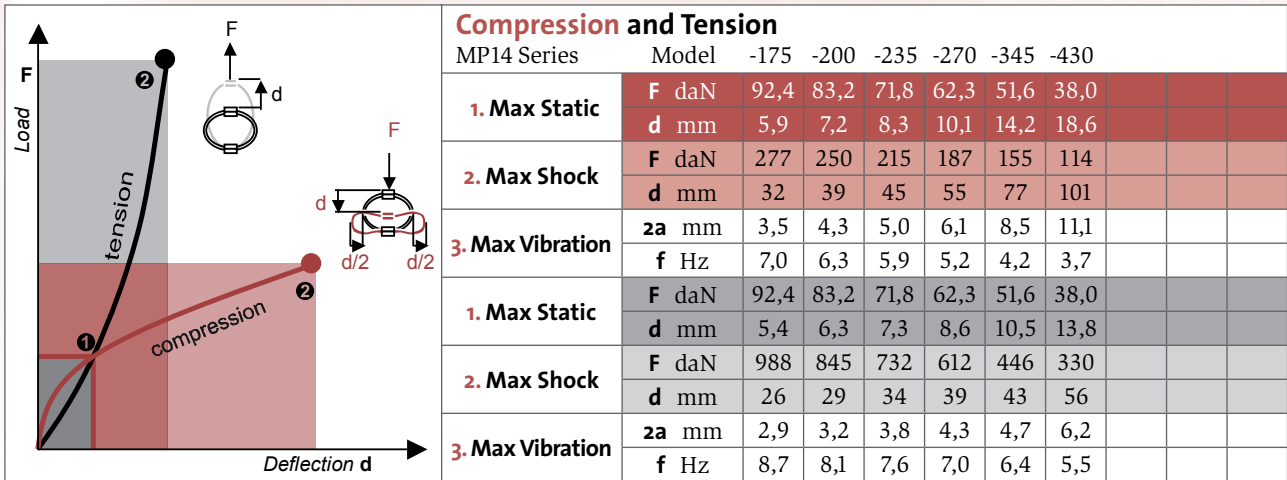

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.