

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range :-180°C +300°C.
- Cheap and quick prototypes from stock.

Dimensions are in mm. For reference only.


Series
Materials and finishes (meets RoHS requirements)
MP16
Cable: stainless steel
Interfaces: aluminium alloy
Insert: stainless steel.
Other materials on request

Model	height h (mm)	width u (mm)	width v (mm)	mass (kg)
-315	130	138	174	2,20
-375	149	151	195	2,32
-415	164	160	204	2,43
-515	194	183	219	2,72
-615	224	205	237	3,02

Interfaces	fixtures holes D
Top 1	1 through hole ø 13,5 mm (option: Insert M16)
Bottom 2	2 through holes ø 13,5 mm






Example MP16-515



Prefix: 'polycal' mount from the MP16 series

Model: -515
height: 194mm
width u: 183mm
width v: 219mm
mass: 2,72kg



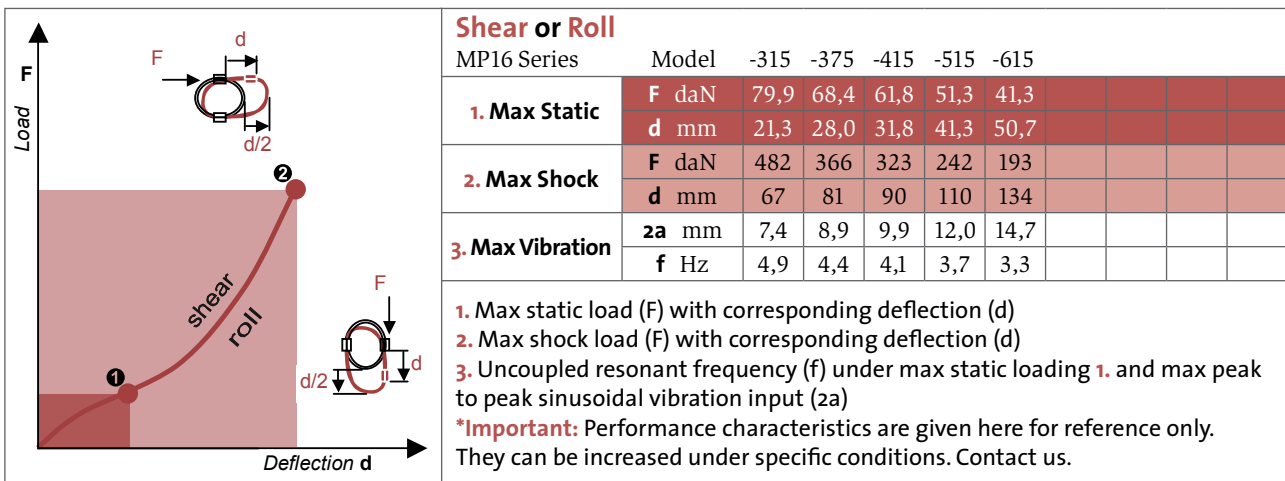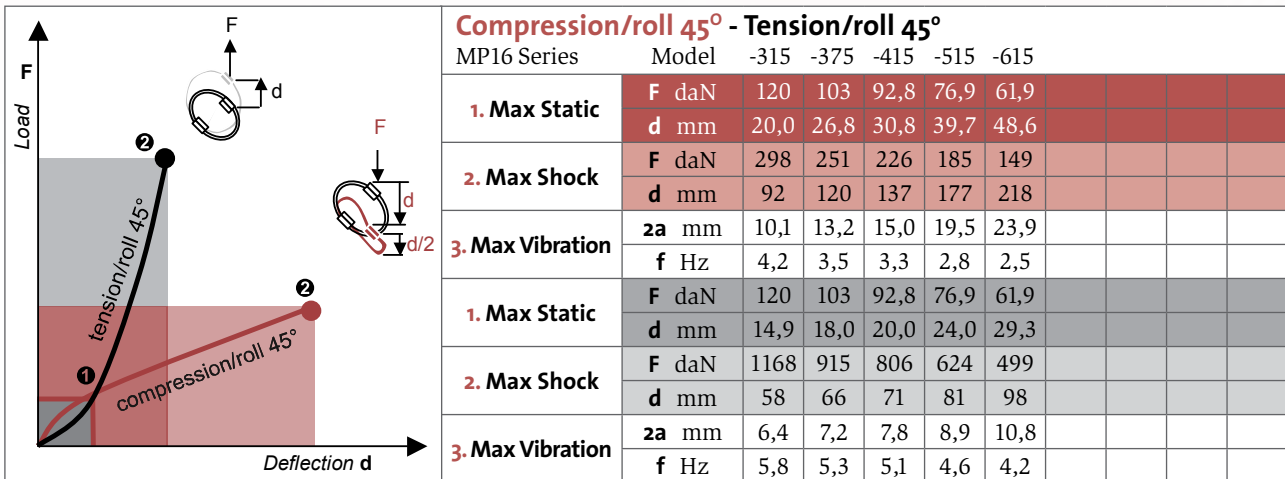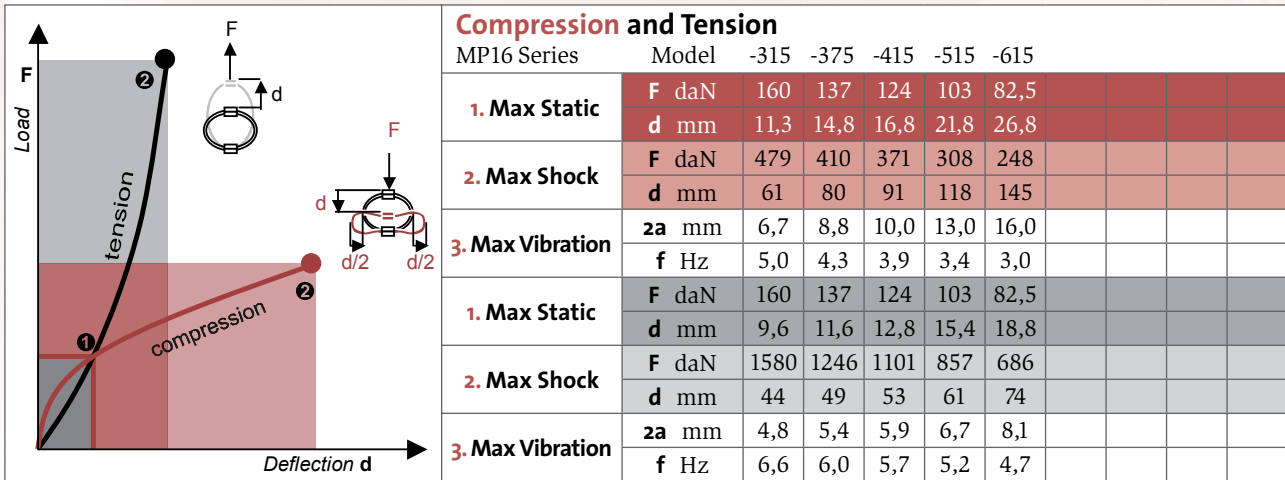

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.