


- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequaled temperature range  $-180^{\circ}\text{C}$   $+300^{\circ}\text{C}$ .
- Cheap and quick prototypes from stock.




Dimensions are in mm. For reference only.

<b>Series</b>
Materials and finishes (meets RoHS requirements)
<b>MP9</b>
<b>Cable:</b> stainless steel
<b>Interfaces:</b> aluminium alloy
<b>Insert:</b> stainless steel.
Other materials on request

<b>Model</b>	height h (mm)	width u (mm)	width v (mm)	mass (kg)
<b>-125</b>	55	65	79	0,20
<b>-180</b>	73	77	90	0,23
<b>-230</b>	86	85	102	0,26
<b>-280</b>	106	97	114	0,29

<b>Interfaces</b>	fixtures holes D
<b>Top 1</b>	1 through hole $\varnothing 7$ mm (option: Insert M10)
<b>Bottom 2</b>	2 through holes $\varnothing 7$ mm

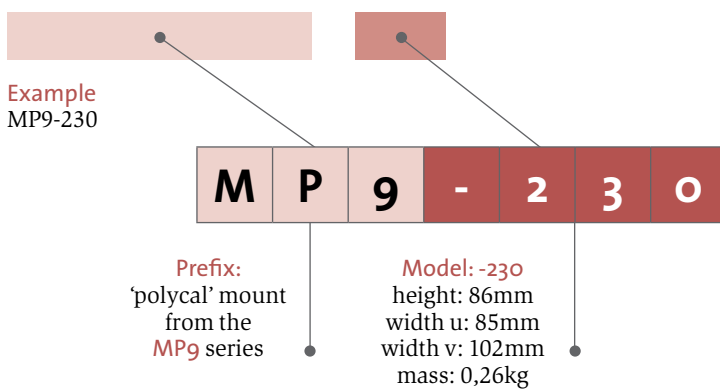

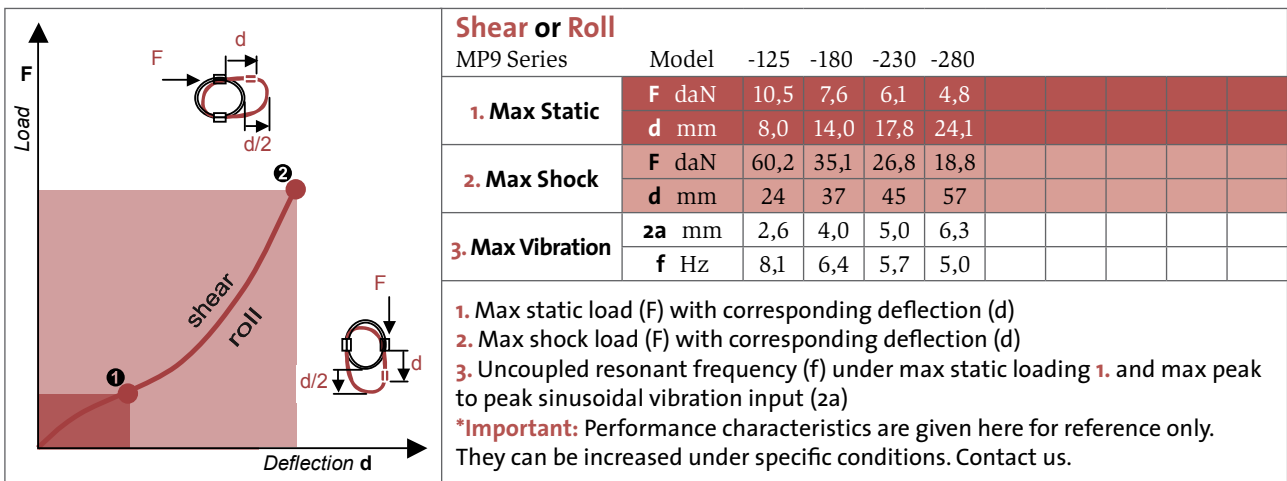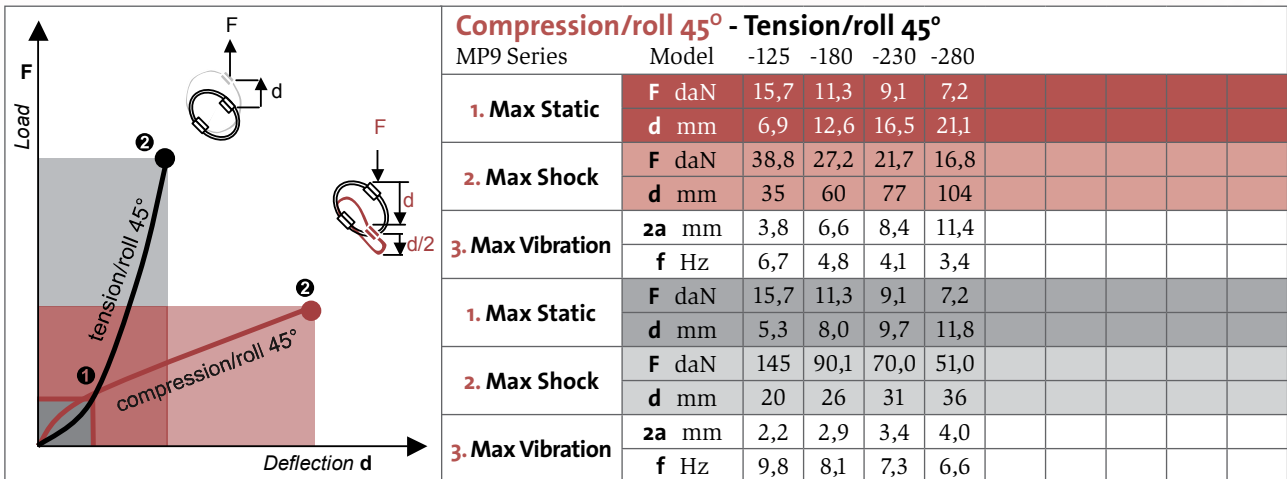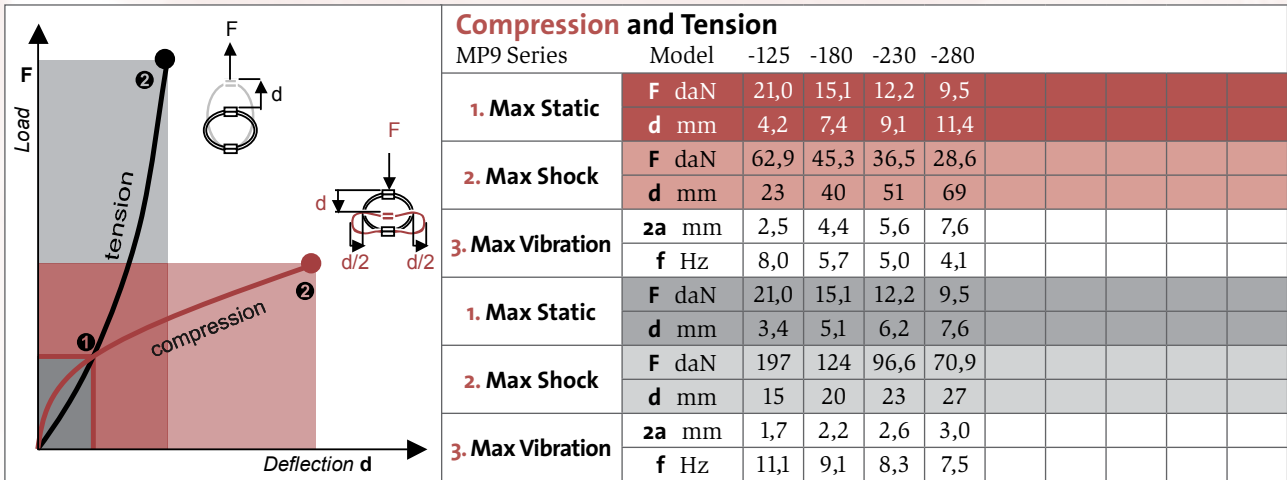

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.