

Product description

Designed for vibration isolation of machines at a speed of more than 500 rpm. Can handle loads from 30–155 kg.



Vertical natural frequency of 3.5 to 5 Hz.

Components

- Steel spring
- Rubber mount
- Mounting plates
- Galvanised metal parts

Application

Especially suitable for generators, compressors, fans, pumps, refrigeration equipment, etc.

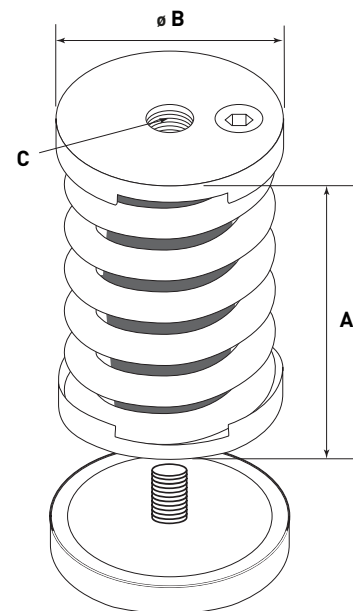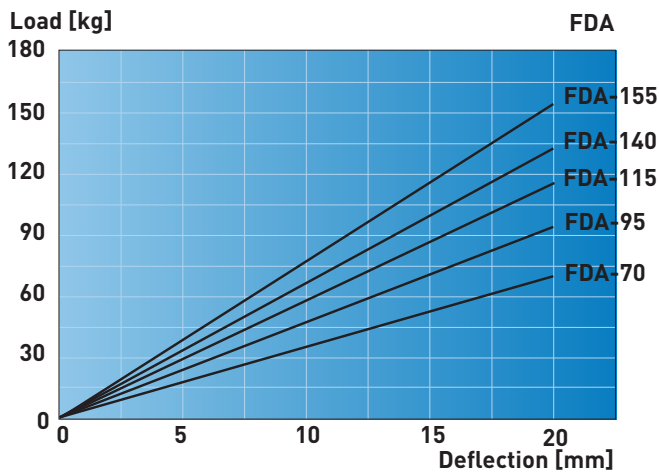

Type	A [mm]	B Ø [mm]	C
FDA 70	80	54	M8
FDA 70 with base plate	87	54	M8
FDA 95	80	54	M8
FDA 95 with base plate	87	54	M8
FDA 115	80	54	M8
FDA 115 with base plate	87	54	M8
FDA 140	80	54	M8
FDA 140 with base plate	87	54	M8
FDA 155	80	54	M8
FDA 155 with base plate	87	54	M8