

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No ageing
- Corrosion resistant
- Unequalled temperature range:
- 180°C to 300°C
- Great adaptability/versatility

SPECIALS ON REQUEST
(material and size)

Dimensions are in millimeters. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
MP2
Cable: stainless steel
Bars: aluminium alloy / surtec 650
Other materials on request

MODEL	height H (mm)	width W (mm)	weight (gr)
-40	16	28	4
-50	19	30	4
-60	23	34	5
-80	27	38	5
-100	31	44	5

INTERFACES			
fixtures holes D	Bar 1		
	through holes \varnothing 3,2 mm	through holes \varnothing 3,2 mm countersunk 90°	threaded hole M3
Bar 2			
through holes \varnothing 3,2 mm	TM2	not standard	not standard
through holes \varnothing 3,2 mm countersunk 90°	TCM	CM2	not standard
threaded hole M3	TIM	CIM	IM2

Other interfaces on request.

M P 2 - 4 0 C I M

SERIE: MP2


'Polycal' mount from the MP2 series



MODEL: -40

height: 16mm
width: 28mm
weight: 4gr

INTERFACE: CIM

through holes \varnothing 3,2 mm
countersunk 90° in bar 1,
threaded hole M3 in bar 2

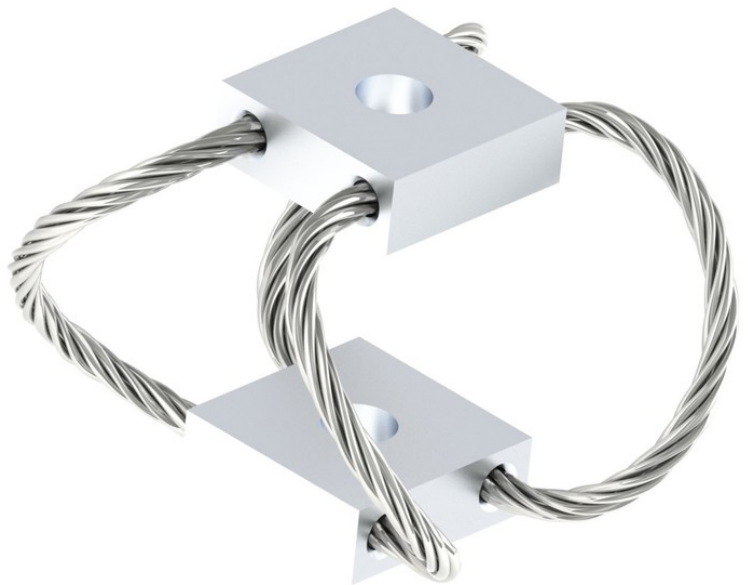

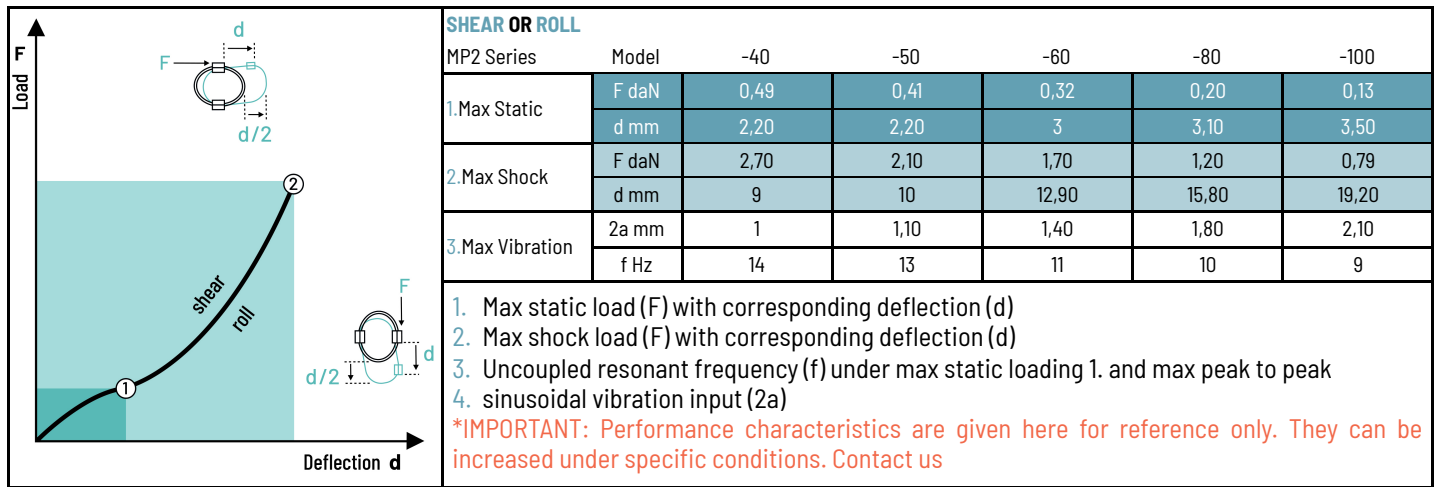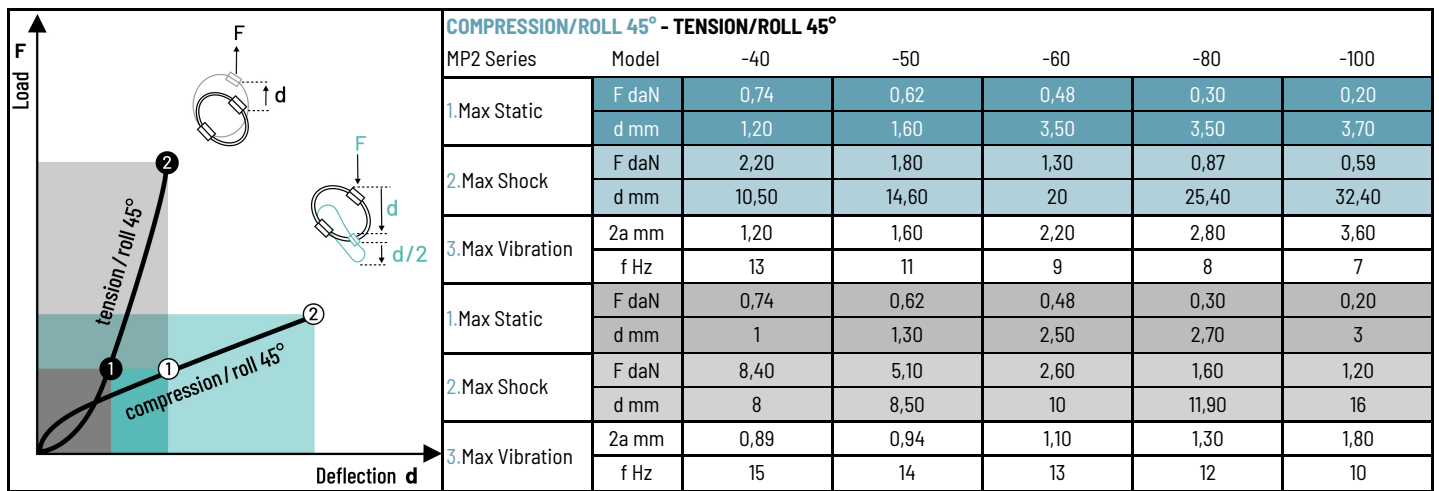

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

- Air** AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
- Ground Forces** GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
- Marine** GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
- Others** GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C